

CERTIFIED LAND CORNER RESTORATION

Index No. 3  
Z5-30-11

State of Wisconsin }  
County of SHAWANO } ss.

43011310000

History of original corner establishment:

U. S. GOV'T. FIELD NOTES.



R. W. NORDIN, do hereby certify that on the 10TH day of NOVEMBER, 1980, I found the location of the NORTHEAST corner of SECTION 6 Township 29 North, Range 31 East, Fourth Principal Meridian, as described hereon; and that from this evidence established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:

RECOVERED 1 1/4" WELL POINT SET BY LOCAL RESIDENT, L. P. REYNOLDS, TO PERPETUATE THE POSITION OF THE 3" X 3" CEDAR POST WHICH WAS SET BY J. MELENDY IN JUNE OF 1902 MARKING CORNER.

Witnesses:


M. J. NORDIN

ED. SCHARDT

RALPH ALFORD

Description of monument and accessories I established to perpetuate the original location of this corner.

SET STANDARD SHAWANO COUNTY MONUMENT. SEE REVERSE SIDE FOR TIES.

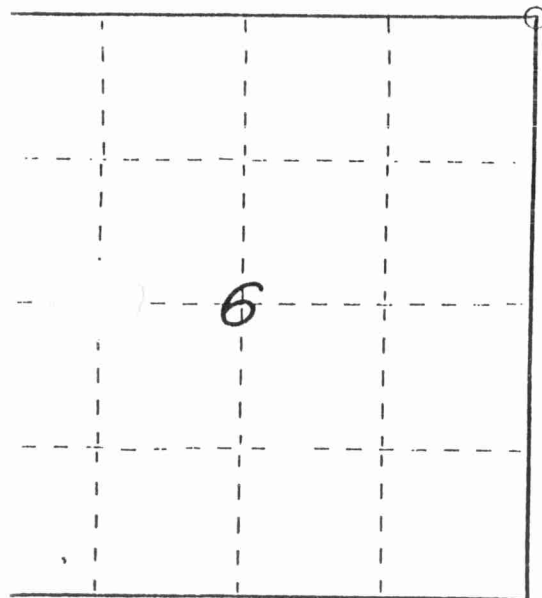

Dated at SHAWANO, Wis., this 10TH day of NOVEMBER, 1980.


Signature R. W. Nordin Title COUNTY SURVEYOR Registration No. S-791  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

Corner monument restored.

By \_\_\_\_\_ Deputy

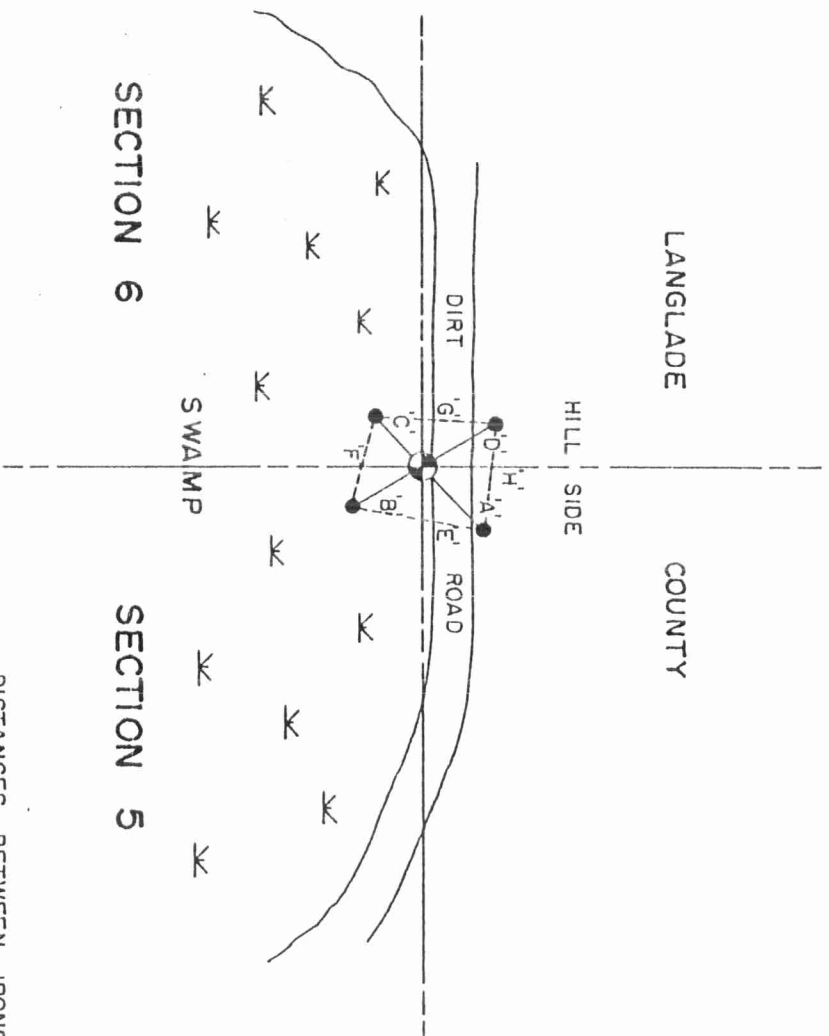

● DENOTES 1" x 24" IRON PIPE SET.  
 BEARINGS ARE MAGNETIC.

A' = N. 46° - 52' E. 22.39'  
 B' = S. 30° - 15' E. 20.60'  
 C' = S. 46° - 52' W. 16.90'  
 D' = N. 30° - 15' W. 22.16'

DISTANCES BETWEEN IRONS.

E' = 33.64'  
 F' = 23.55'  
 G' = 30.72'  
 H' = 27.77'