

4301406 9000 2005  
43114 35 0018

# U.S. PUBLIC LAND SURVEY MONUMENT RECORD

(Prepared and as required by S. A-E 7.08 WI Administrative Code)  
The Closing Corner to Section 35, T. 31N., R14E., Langlade County, WI

### Corner was: (check all that apply)

- Restored through acceptance of an obliterated evidence location.
- Restored through acceptance of a found perpetuated location.**
- Determined to be lost and reestablished through proportionate methods. (Show bearings and distances to PLSS corners used for proportioning)
- Restored/recovered/reestablished in a location that differs from a previously established position. (Show difference in plan view below.)
- Check here if additional information is shown on the reverse side of this form.

### Describe record evidence, recovered physical evidence, occupational evidence, testimonial evidence and all other evidence considered in the recovery/restoration of corner.

1933 GLO resurvey of the Third Standard Parallel. 35.98 chains from the section corner to sec 35 & 36, "The true point for the closing corner of Sects 5 and after moving 22 links. N. from its original position as determined from an original bearing tree in order to place it on the true closing line."

Set a 6" diameter, 24" long concrete monument w/brass cap marked new bt's cedar 8", S53°E 49 links; cedar 8" S40 1/2°W, 84 links.

September 2005 Tim Rusch, Paul Mattmiller, and Dave Tlusty, measured record distance (4.12 chains) from the S 1/4 corner and found concrete monument laid over and covered with vegetation and found remains of cedar bt's.


### Physical description of the monument set:

Reset concrete monument and tied as follows.

### Describe the accessories used to perpetuate the location of the corner. Include a plan view drawing and indicate accessories found/set. Describe measuring point on bearing trees. Show any topographic features that would aid in future recovery of the corner.

Bt's are blazed and marked with aluminum Bt tag. Distances measured to aluminum nail on right side base of tree.

- ① N85°E 15.49'
- ② S27°W 13.35'
- ③ N53°W 6.78'
- ④ N8°W 13.40'
- ⑤ White plastic T post 0.5'N

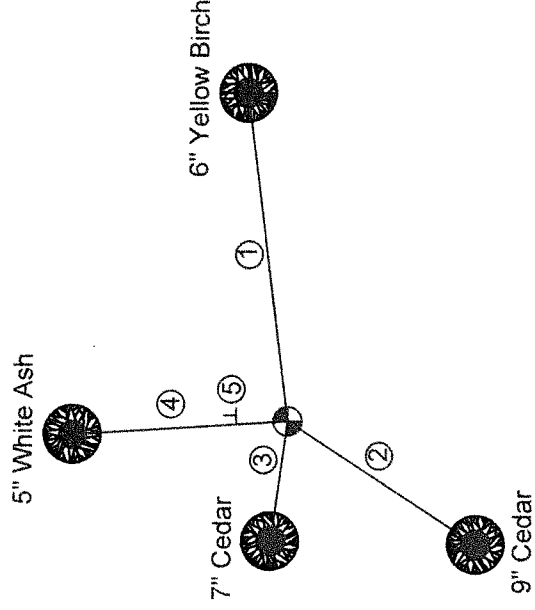

Bearings are magnetic  
handheld compass


NOT TO SCALE

DRAFTED BY:  
PAUL MATTMILLER


I, Timothy J. Rusch RLS 2671, certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Record is correct and complete to the best of my knowledge and belief.

*Timothy J. Rusch*  
Signature  
*corrected 12/7/2005*  
Date

SURVEYOR'S SEAL

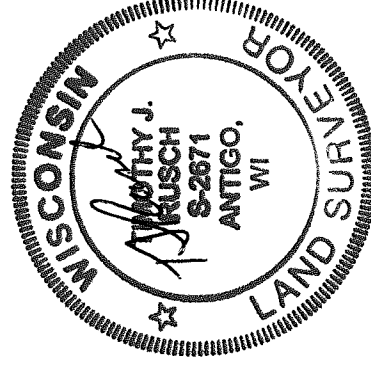

The closing corner to Section 35  
T. 31 N., R. 14 E.  
Langlade County, WI

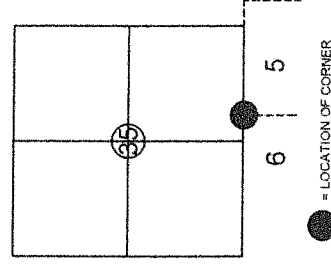

INDEX NO. Z 19-20 31-14