

CERTIFIED LAND CORNER RESTORATION

Index No. <sup>A</sup> ~~B~~-16  
31-9

State of Wisconsin }  
County of LANGHADE } ss.

I RAYMOND J. HALLISY, do hereby certify that on the 27 day of SEPTEMBER, 1980, I found evidence of the E 1/16 corner of SEC 34 - Township T32N, North, Range 9E, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

G. KLYKA JR.

History of original corner establishment:

MAY 1937 RESURVEY PROJECT


Description of corner evidence found:

OLD SCRIBED WOOD POST 5X5" SQUARE  
ROTTED BUT 1 FACE SCRIBED 1/16  
1 FACE SCRIBED 3

B.T. HEMLOCK 8" 528°E 20 LKS MISSING

Description of monument and accessories I established to perpetuate the original location of this corner.

NEW MONUMENT 2" IRON PIPE AND BRASS CAP



NEW BEARING TREES SCRIBED  
SOFT MAPLE 11" - 39°W 43.6 LINKS  
SOFT MAPLE 13" - N72°W 4.2 LINKS  
YELLOW BIRCH 7" 574°E 21.0 LINKS


Dated at ANTIGO, Wis., this 27 day of SEPTEMBER, 1980.

Signature Raymond J. Hallisy, Title Reg. Land Surveyor Registration No. 5685  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

By \_\_\_\_\_ Deputy

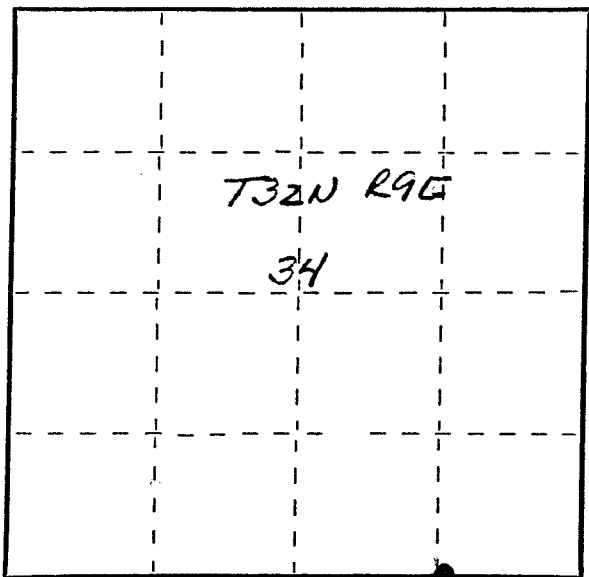

○ = Corner monument restored. T31N SEC 3 R9E

FORM 985 H. C. MILLER CO., MILWAUKEE  
43269340010