


U.S. PUBLIC LAND SURVEY MONUMENT RECORD

4321110000

NOTE: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 7.08 U.S. Public Land Survey Monument Record (3)(a)(b)(c)(d)(e)(f)(g)(h)(i). An additional sheet may be added if necessary to conform with said requirements.

(a) Corner location: Township 32 North
Range 11 East

Town of NEVA, LANGLADE County, Wisconsin




THIS CORNER WAS RESTORED THROUGH ACCEPTANCE OF A FOUND PERPETUATED LOCATION AND SINGLE PROPORTIONATE METHODS.

(b)(f)(g)(h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish. Indicate type of monument found or set and sign post.


The original corner was established in 1860 by H.C. Fellows. In 1887 B.F. Dorr referenced to this corner in Section 13. In 1888 B.F. Dorr referenced to this corner in Section 13. In 1889 B.F. Dorr referenced to this corner in Section 12. Could find no other reference to this corner. At site found old fence running North and South. In 1889 Dorr referenced to a stone at the South 1/8 post on the West line of Section 12. I searched area but could not find stone, but did locate fence running East and West. I took measurements from the West 1/4 corner of Section 13, to said fence line at the South 1/8 corner on the West line of Section 12. I proportioned distances and on fence running North-South. I believe old fence best perpetuated original location in a East-West direction.

SEE SURVEY MAP BY MSA, PROFESSIONAL SERVICES, % EUGENE C. UTTECH, DATED: 8/22/02 FOR TOWN OF NEVA REMONUMENTATION PROJECT WITH PROPORTIONATE DISTANCES TO ADJACENT 1/4 CORNERS.


(c)(d)(e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

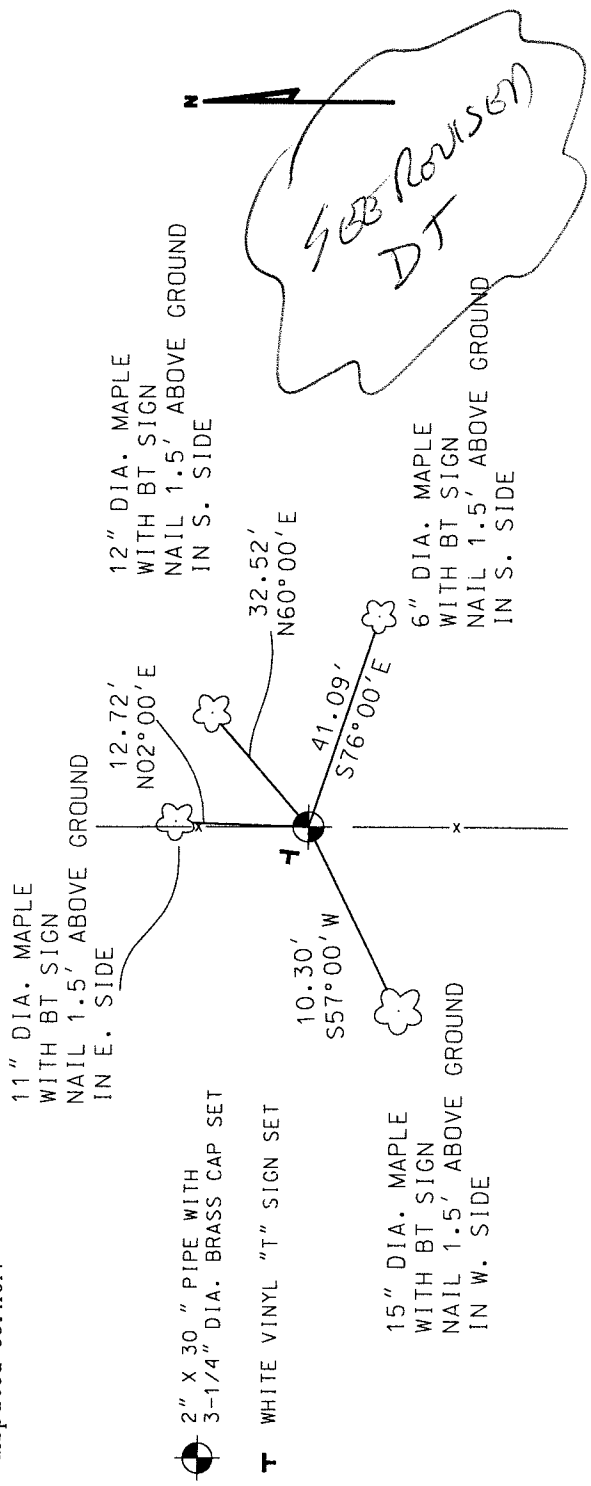

(i) I, Eugene C. Uttech, Registered Land Surveyor #S-1451 hereby certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

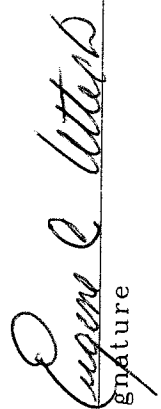
 Signature

8/22/02
Date

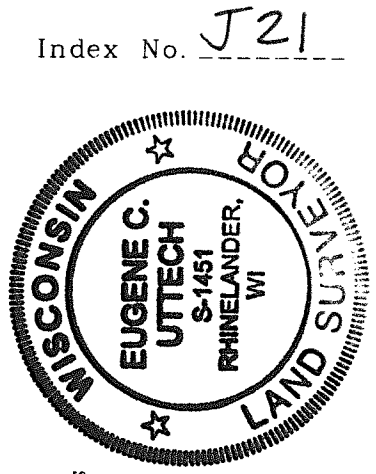

Index No. J21