

CERTIFIED LAND CORNER RESTORATION

32-13
Index No. R-3

State of Wisconsin }
County of Lan glade } ss.

History of original corner establishment:

Corner established June 30, 1968 by Owens- Illinois, Woodlands Div, Tomahawk, Wis. .
1 " iron pipe buried in road. 7" sq. post witness corner marked W. C. with
location tag scribed "cor. 32 links E. "

I Raymond J. Hallisy, do hereby
certify that on the 12 day
of July, 1969, I found
evidence of the ~~corner~~ N 1
corner of 30
Township 32, North, Range
13 E, Fourth, Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Description of corner evidence found:

Same as above.

Resident witnesses:

Jerry ~~W~~ix
Gerald Kryka


Description of monument and accessories I established to perpetuate the original location of this corner.

Set 4" brass cap in cement and rock mound; Marked
THIS IS A WITNESS CORNER SET 50 ft.
WEST OF TRUE CORNER.

Bearing trees marked BT
BT's witnessed to true corner
BT Elm 14" N 74° E 27' 4"
BT Hard maple 10" N 80° 27' 1"

T 32N R 13E
Sec 19
45
Sec 30

COR. 50 FT EAST

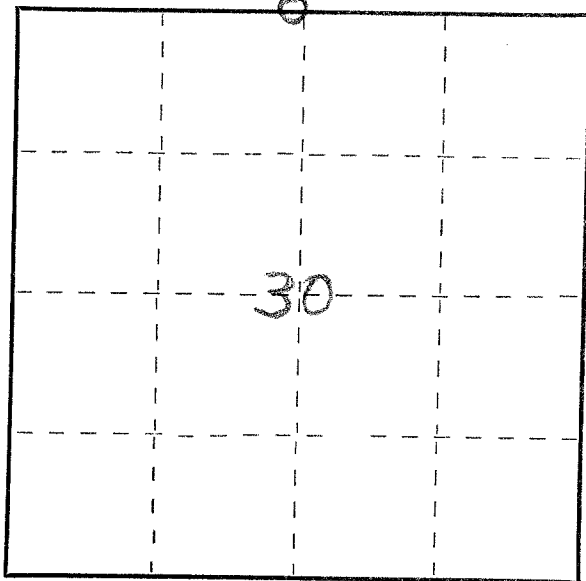

○ = Corner monument restored.

Dated at Antigo, Wis., this 12 day of July, 1969.

Signature Raymond J. Hallisy Title Reg. Land Surveyor Registration No. S-685
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE