


CERTIFIED LAND CORNER RESTORATION

Index No. E-10


State of Wisconsin }  
County of Langlade } ss.

I, Daniel K. Pleoger, do hereby certify that on the 21 day of January, 1980, I found evidence of the W 1/16 corner of Sections 4 & 9 Township 33 North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:



FORM 985 H. C. MILLER CO., MILWAUKEE

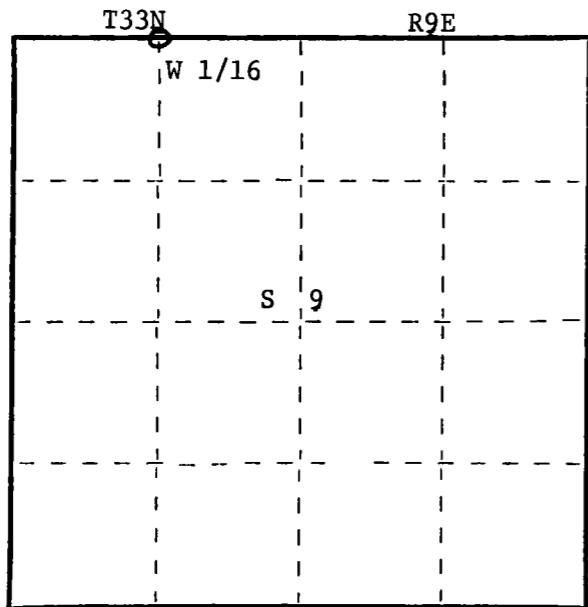

○ = Corner monument restored.

History of original corner establishment:

No evidence of any previous corner

Description of corner evidence found:

Total distance from section corner 4-5-8-9 to 1/4 corner between sections 4 & 9 for a distance of 2678.649 ft. at bearing S86-43-38E.  
Set W 1/16 1339.324 ft. intermediate

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a railroad spike in center line of CTH "H" for true corner. Set a 1 1/2" iron pipe with screw on brass cap south 53.79 ft. of true corner for witness corner stamped:

Monument projects 24" above ground  
Marked NBTs to true corner  
Sugar 7" S35W 82.80 ft.  
Maple 8" S38E 88.92 ft.      Scriber 1/16 - B.T.

T33N R9E  
W 1/16  $\frac{S4}{S9}$  W.C.  
N53.79 ft.  
S1537 - 1980

Dated at Rhineland, Wis., this 22 day of September, 1981

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

By \_\_\_\_\_ Deputy