

CERTIFIED LAND CORNER RESTORATION


Index No. C-4

State of Wisconsin }
County of Langlade } ss.

I, Daniel K. Plegger, do hereby certify that on the 9th day of January, 1981, I found ~~evidence of the~~ established ~~corner of the~~ EC 1/16 corner of section 6 Township 33, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

History of original corner establishment:
No evidence of any previous corner.

Resident witnesses:

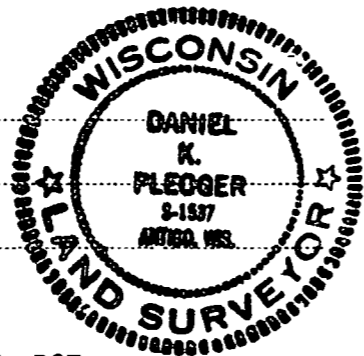

Description of corner evidence found:

Total distance from 1/4 corner between sections 5 and 6 to C 1/4 corner section 6 is 2714.60 feet at bearing S 88-06-02 W.
Set EC 1/16 corner 1357.30 intermediate.


Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" I.D. iron pipe with screw-on brass cap - stamped:
Monument projects 18" above ground.

Marked NBT's:
Maple 5" S9°E 7.80 feet
Maple 6" S75°W 24.83 feet
Maple 7" N6°W 25.13 feet
all scribed 1/16 B.T.

T33N R9E
EC 1/16 S | 6
S1537-1981

FORM 965 M. C. MILLER CO., MILWAUKEE

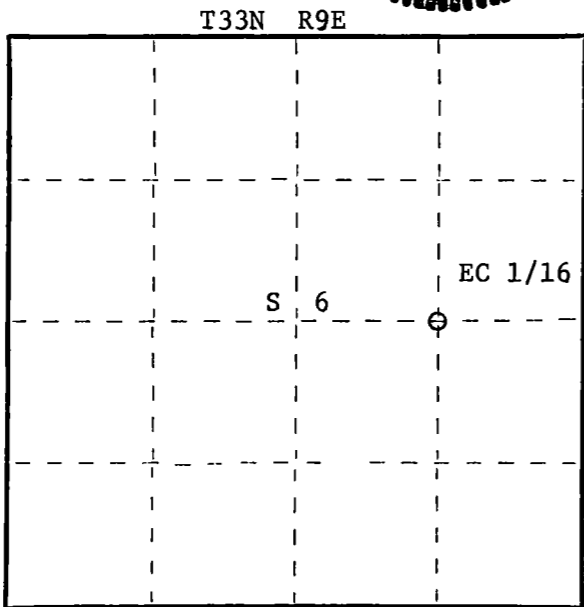

○ = Corner monument restored.

Dated at Rhineland, Wis., this 24th day of April, 1981

Signature Daniel K. Plegger Title Registered Land Surveyor Registration No. 1537
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy