

CERTIFIED LAND CORNER RESTORATION

Index No. B-3

State of Wisconsin }
County of Langlade } ss.

I Daniel K. Pleoger, do hereby certify that on the 21st day of January, 19 81, I ~~found~~ re-established the NC 1/16 corner of section 6 Township 33, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


History of original corner establishment:

No evidence of any previous corner.

Description of corner evidence found:

Total distance from 1/4 corner between sections 6 and 31 T33 and 34N R9E to C 1/4 corner section 6 is 2750.23 feet at bearing S 3-05-53 W.
Set NC 1/16 1430.382 feet of N 1/4 corner and 1319.85 feet of C 1/4 corner.

Resident witnesses:

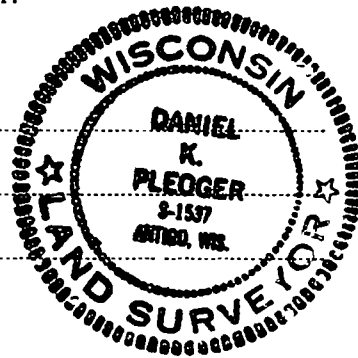

Description of monument and accessories I established to perpetuate the original location of this corner.


Set a 1-1/2" I.D. iron pipe with screw-on brass cap - stamped:
Monument projects 24" above ground.

Marked NBT's:

Maple 5" N82°W 17.40 feet
Maple 5" S16°W 33.0 feet
Maple 4" S34°E 22.0 feet
all scribed 1/16 B.T.

T33N R9E
NC 1/16 S+6
S1537-1981

FORM 985 H. C. MILLER CO., MILWAUKEE

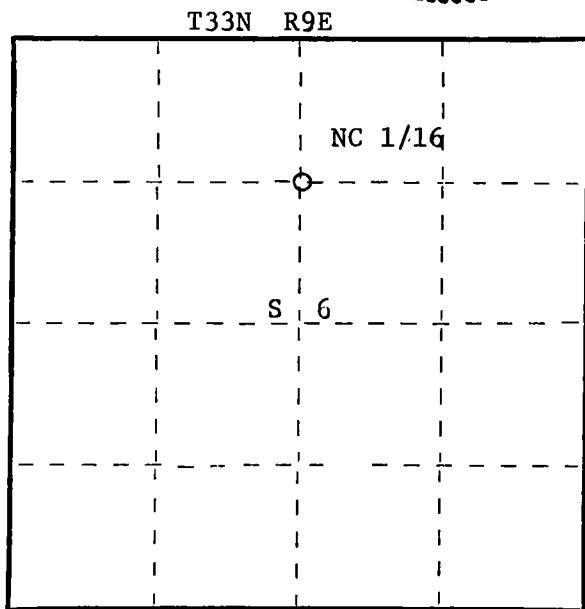

○ = Corner monument restored.

Dated at Rhineland, Wis., this 27th day of April, 19 81

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19 _____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy