

CERTIFIED LAND CORNER RESTORATION


Index No. Y-18

State of Wisconsin }
County of Langlade } ss.

I Daniel K. Pleoger, do hereby certify that on the 15th day of March, 19 82, I ~~found~~ ~~evidence of~~ the W 1/16 corner of sections 26 & 35 Township 33, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

FORM 983 H. C. MILLER CO., MILWAUKEE

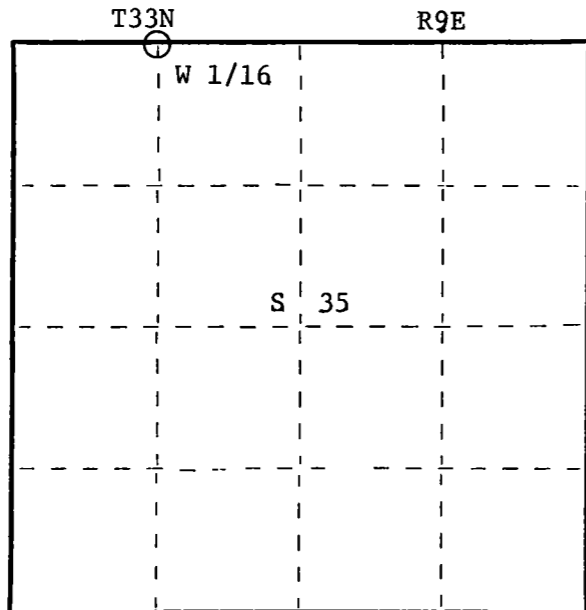

○ = Corner monument restored.

History of original corner establishment:

No evidence of any previous corner.

Description of corner evidence found:

Total distance from section corner 26-27-34-35 to 1/4 corner between sections 26 and 35 is 2667.614 ft. at bearing S86-12-48E.
Set W 1/16 1333.807 ft. intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 2" iron pipe with brass cap stamped: T33N R9E

Monument projects 12" above ground.

Marked NBTs:

White spruce 5" S78W 19.40 ft.
Maple 3" N78E 8.48 ft.

Scribed - B.T.

W 1/16 $\frac{S|26}{S|35}$

S1537 - 1982

Dated at Rhineland, Wis., this 22nd day of April, 19 82

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19 _____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy