

CERTIFIED LAND CORNER RESTORATION

Index No. W-17

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:
No evidence of any previous corner.


I Daniel K. Pleoger, do hereby
certify that on the 26th day
of February, 19 82, ~~found~~ Est.
~~evidence of the~~ N 1/16
corner of Sections 34 & 35
Township 33, North, Range
9 East, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Description of corner evidence found:

Total distance from section corner 26-27-34-35 to 1/4 corner between sections 34 & 35 is 2709.311 ft. at bearing S1-03-26W.

Set N 1/16 1354.66 ft intermediate.

Resident witnesses:



Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 2" iron pipe with brass cap stamped:

T33N R9E

Monument projects 12" above ground.


Marked NBTs:

N 1/16 34|35

Yellow birch 7" N71E 16.75 ft.
Maple 10" N77W 14.79 ft.

S1537 - 1982

Scribed 1/16 B.T.

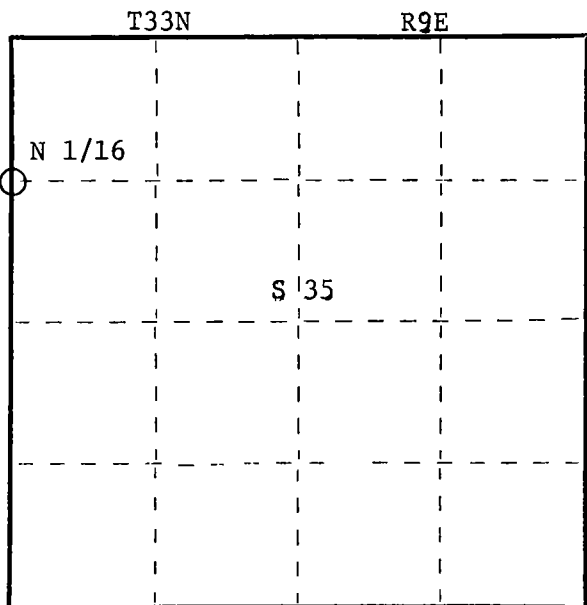

○ = Corner monument restored.

Dated at Rhineland, Wis., this 26th day of April, 1982

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy