

CERTIFIED LAND CORNER RESTORATION

Index No. A-29

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:
No evidence of any previous corner.

T32N-R9E

I Glen Barker, do hereby
certify that on the 21st day
of February, 19 83, I ~~found~~ found Estab.
~~evidence~~ of the E 1/16
corner of Sections 1 & 36
Township 32 & 33, North, Range
9 East, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Description of corner evidence found:

Total distance from section corner 1-6-31-36, T32 & 33N R9 & 10E to 1/4 corner
between sections 1 & 36 is 2630.73 ft. Set E 1/16 1315.36 ft. intermediate.

Resident witnesses:

J. Claflin - R.L.S.

H. Wagoner



Description of monument and accessories I established to perpetuate the original location of this corner.

Set a iron railroad spike 5.0 ft. south of center line C.T.H. 'I' for true corner.
Set a 2" iron pipe with brass cap 49.40 ft. north of true corner for witness
corner. Cap stamped:

T33N R9E

S49.40 ft.

S 36 *M.C.*

S 1

S1682 - 1983


T32N R9E

Monument projects 18" above ground.

Marked NBTs

Maple 7" N32W 75.55 ft - Scried 1/16 B.T. E 1/16

B.O. - Power pole #3309-36R6-N69E 90.88 ft.

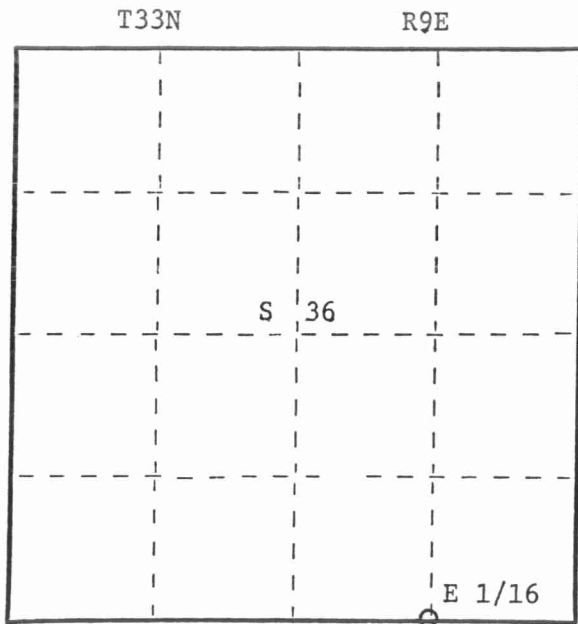

○ = Corner monument restored.

Dated at Rhinelander Wis., this 11 day of May, 1983

Signature Glen Barker Title Registered Land Surveyor Registration No. S1682
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy

Stock No. 26272

FORM 985