

CERTIFIED LAND CORNER RESTORATION

Index No. V-25

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:
No evidence of any previous corner.

I, Glen Barker, do hereby certify that on the 11th day of February, 1983, I found evidence of the S 1/16 corner of Sections 36 & 31 Township 33 North, Range 9 & 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:
Total distance from section corner 25-26-30-31 T33N R9 & 10E to 1/4 corner between sections 36 & 31 is 2661.21 ft.
Set S 1/16 1330.61 ft. intermediate.

Resident witnesses:

J. Claflin - R.L.

H. Wagoner



Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1" x 12" iron pipe 3.0 ft. west of center line of Brown Bear Road for true corner.

Set a 2" iron pipe with brass cap for witness corner east 35.37 ft of true corner - cap stamped:


Monument projects 18" above ground.

Marked NBTs to true corner

Twin maple 6" S30W 47.53 ft.
Maple 6" S53E 81.11 ft.

Scribed 1/16 - B.T.

T33N
R9E R10E. W.C.
S 1/16 36 31
W. 35.37 ft.
1682 - 1983

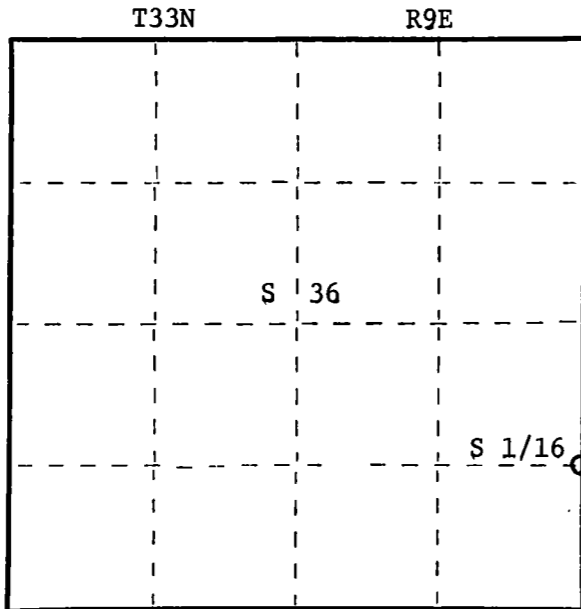

O = Corner monument restored.

Dated at Rhinelander, Wis., this 11th day of May, 1983

Signature: Glen Barker Title: Registered Land Surveyor Registration No. S1682
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of..., I hereby certify that the within instrument was filed in this office for record on the... day of..., 19... at... o'clock... M.

(Register of Deeds)

By... Deputy

McMillan Company Stock No. 26272 FORM 985