

CERTIFIED LAND CORNER RESTORATION

Index No. X-22

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:
Someone's old 1" iron pipe with screw-on cap.


I, Glen Barker, do hereby
certify that on the 11th day
of February, 19 83, I ~~found~~ found ~~estab.~~
~~evidence of the~~ WC 1/16
corner of section 36
Township 33, North, Range
9 East, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Description of corner evidence found:
Total distance from 1/4 corner between sections 35 & 36 to C 1/4 section 36 is 2500.26 ft.
Set WC 1/16 1250.13 ft. intermediate.
When setting monument recovered old 1" iron pipe with screw-on cap at same position.

Resident witnesses:

J. Claflin - R.L.

H. Wagoner

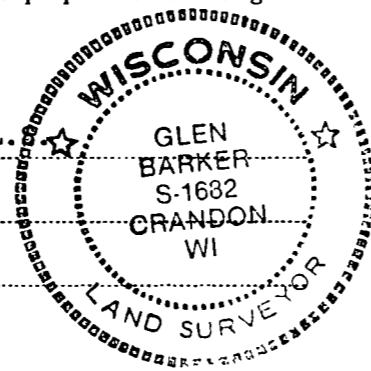

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 2" iron pipe with brass cap stamped:

Monument projects 12" above ground.

T33N R9E

Marked NBTs


Maple 6" N28E 22.95 ft.

WC 1/16 S 36

Sugar 6" S15E 31.83 ft.

Scribed 1/16 - B.T.

S1682 - 1983

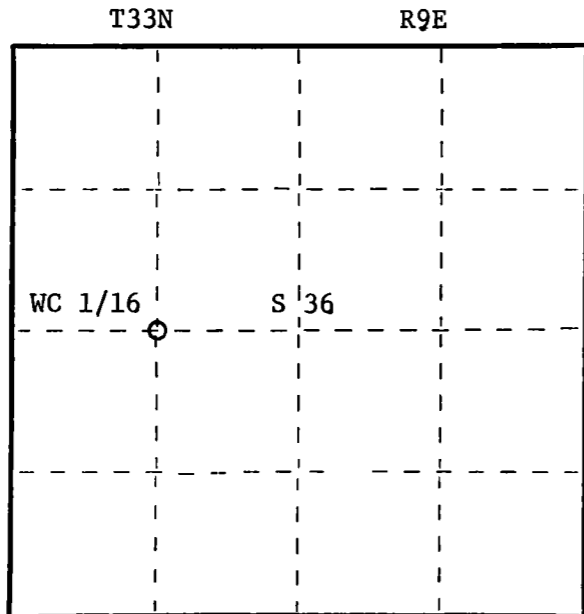

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 11th day of May, 19 83.

Signature Glen Barker Title Registered Land Surveyor Registration No. S1682
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19 _____
at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy

FORM 985 H.C. Miller Company Stock No. 26272