

CERTIFIED LAND CORNER RESTORATION

Index No. U-V-22

State of Wisconsin }
County of Lafayette } ss.


History of original corner establishment:
NONE

I Raymond J. Halliday do hereby certify that on the 3 day of September, 19 70, I found evidence of the ESTABLISHED THE SOUTH H.C. corner of N-S QUARTER LINE OF SW 1/4 SEC 25 Township 33N, North, Range 10W, Fourth, Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Description of corner evidence found:
South west corner of Lot 11 and established W 1/6 on south section line of Sec 25 T33N R10W

Resident witnesses:
Jerry Weix
Jerry Boyka

Description of monument and accessories I established to perpetuate the original location of this corner.
TRANSIT LINE SOUTH FROM H.C. TO W 1/6. TOTAL DISTANCE 1324.46 FEET AND 3.3 INCS WEST OF CORNER. SET CORRECT H.C. 600.60 FEET (910 CM) NORTH OF 1/6 CORNER. SET 2" BRASS CAP ON CEMENT WITH MONUMENT 4" X 2'

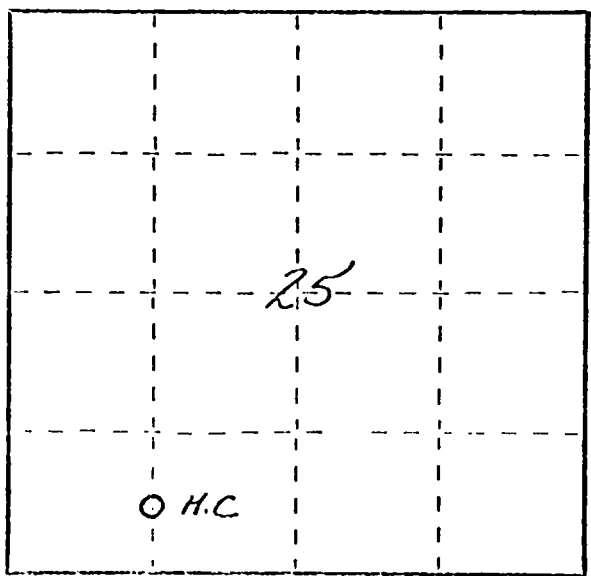

Bearing Pins
10" Red pins 587°E 11' 11"
6" WH pins N16°E 17' 1"



Dated at Acadago, Wis., this 5 day of September, 19 70

Signature Raymond J. Halliday Title Reg. Land Surveyor Registration No. 5-685
(County Surveyor, Registered Land Surveyor or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19 _____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy

○ = Corner monument restored.