


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

I N S T R U C T I O N S : This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.
 ○ = Corner monument restored.

SOUTH $\frac{1}{4}$ CORNER OF SECTION 7-33-13
 ORIGINAL SURVEY BY NOWLIN, IN 1865

*6/16/98 D.T. DW
 FND SMALL MASCOWAY NAIL.
 CHECKED 3 CURB TIES -OK.
 PULLED NAIL & SET NEW
 2 1/2" BOWTSEN SNI NAIL*

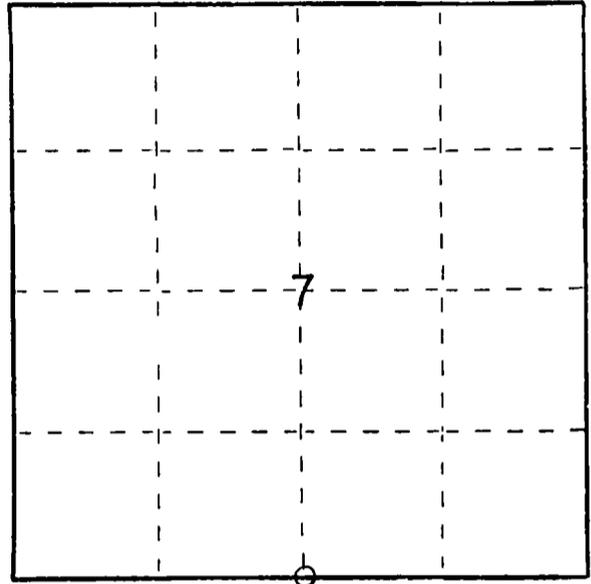


- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

FOUND P.K. NAIL AT CORNER, SAID NAIL USED AS $\frac{1}{4}$ CORNER IN ADJACENT SURVEYS, FOUND REMAINS OF BRASS CAP IN CONC, W.C. CERTIFIED BY POSS R.L.S. IN 1969, SAID CAP DESTROYED DURING CONST. OF COUNTY "A", SAID REMAINS 50FT. \pm NORTH OF SOUTH $\frac{1}{4}$ CORNER OF SECTION 7

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.) Describe witness monuments.

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

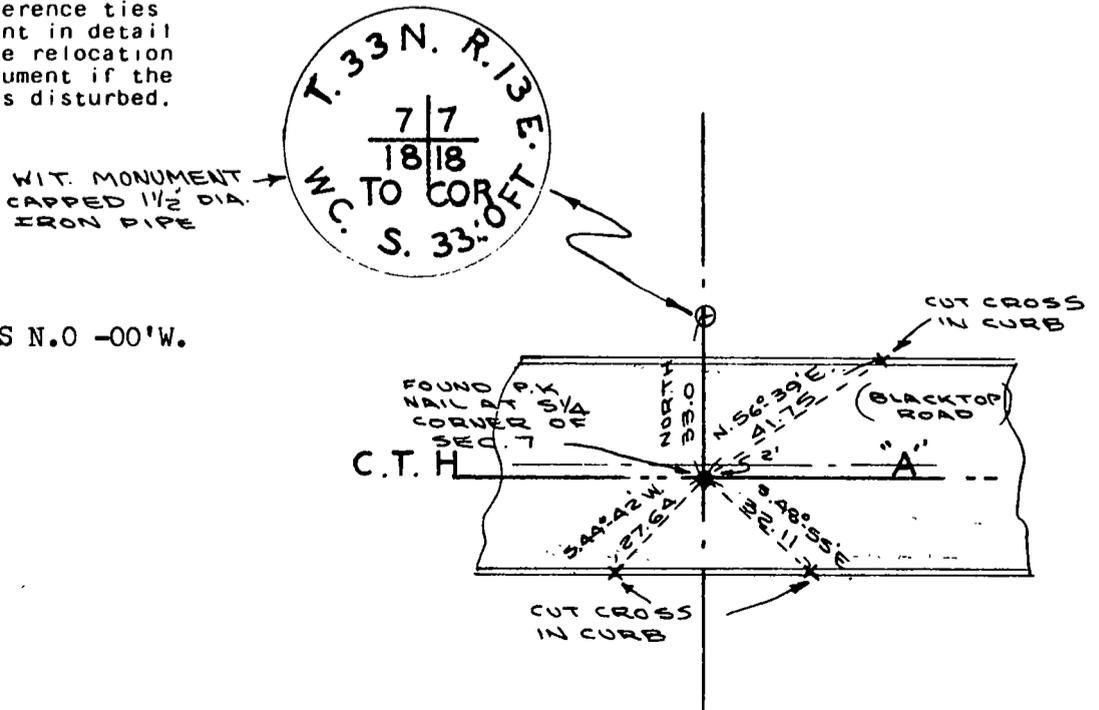

NOTE! COUNTY MONUMENT IS N.0 -00'W.
 33.00FT. FROM $\frac{1}{4}$ CORNER

N
 MAG. NORTH

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.


NONE

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(2)

(g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

NO

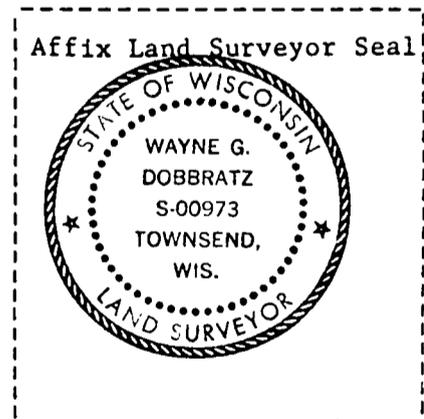

(i) I, WAYNE G. DOBBRATZ
(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature

Date

7/8/89

CERTIFIED LAND CORNER RESTORATION

33-13

Index No. **J-9**


State of Wisconsin }
County of LANGLADE } ss.

I, ROBERT J. POSS, do hereby certify that on the 10TH day of AUGUST, 1969, I found evidence of the 1/4 corner BETWEEN SECS. 7 & 18 Township 33, North, Range 13 EAST, Fourth, Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

J. SCHUETTE,
NORMAN BRAUN (T. CNR.)
JOHN KNOBLE (T. CLERK)

FORM 985 M. C. MILLER CO., MILWAUKEE

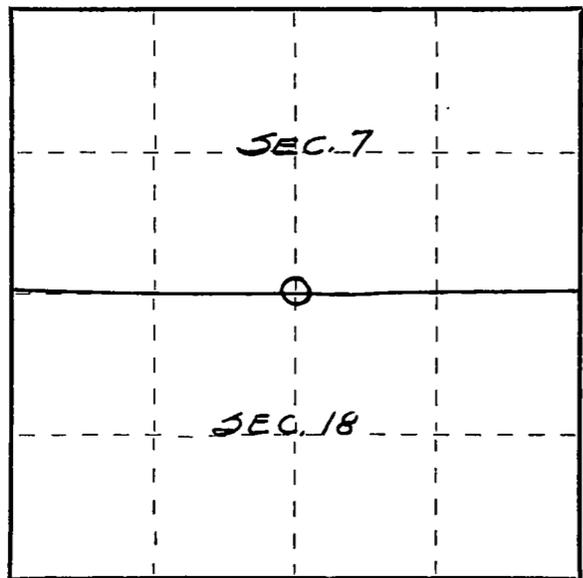


○ = Corner monument restored.

History of original corner establishment:


WITNESS COR. SET BY PREVIOUS SURVEYOR.
LOCATED I. PIPE WITH DIP NEEDLE TO VERIFY.

Description of corner evidence found:

I. PIPE W.C. & COR.

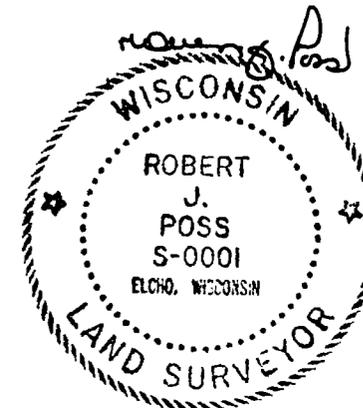

Description of monument and accessories I established to perpetuate the original location of this corner.

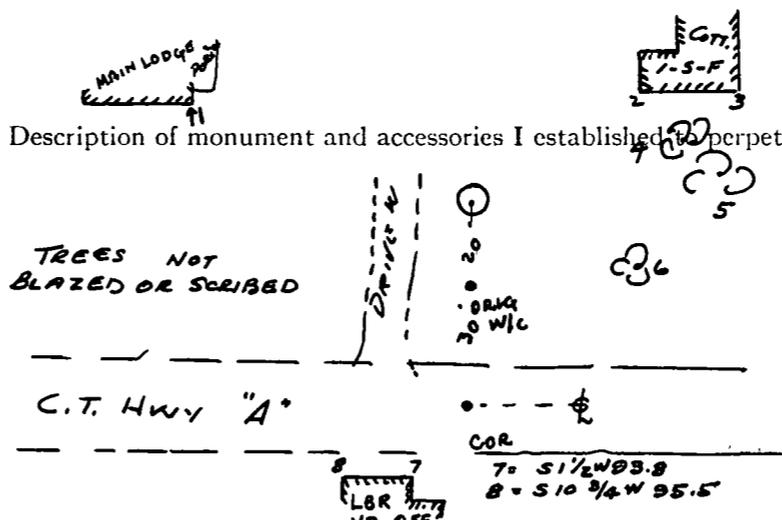

BRASS CAP IN CONCRETE.
① MKD. COR.
SEC. 7
SEC. 18
50 FT. S TO COR

- 1: COR RES. SE MAIN LODGE N 49 1/2 W 113.3'
- 2: COR GOTTAGE N 5 1/2 E 95.3
- 3: " " N 19-25 E 101.5'
- 4: MAPLE 20 N 24-30 E 57'
- 5: LARGEST MAPLE ABOUT 24 N 42 E 34.4
- 6: W. ASH - 4 N 57 1/2 E 38

Dated at ELCHO, Wis., this 26TH day of APRIL, 1969.

Signature Robert J. Poss Title REG. LAND SURVEYOR Registration No. S-1
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy