
3314060020

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

HISTORY OF ORIGINAL CORNER ESTABLISHMENT AND SUBSECUENT RESTORATION AND DESCRIPTION OF ANY RECORD, MONUMENT OCCUPATIONAL, TESTIMONIAL OR OTHER EVIDENCE CONSIDERED:

THE ORIGINAL CORNER WAS ESTABLISHED IN 1865 BY JAMES NOWLIN. ORIGINAL BEARING TREES: BIRCH 12" N10E 10LKS., HEMLOCK 30" S35W 15LKS. 12/22/99 CHARLEY BRINKMEIER AND GERRY BAHAR SEARCHED FOR CORNER ALONG FENCELINE IN SWAMPY AREA, FOUND NOTHING. WE SET A 2" X 30" BRASS CAPPED LANGLADE CO. MONUMENT ON THE FENCELINE AT A PRORATED DISTANCE ACCORDING TO THE ORIGINAL GOV'T NOTES




CORNER WAS: (CHECK ALL THAT APPLY)

- RESTORED THROUGH ACCEPTANCE OF AN OBLITERATED EVIDENCE LOCATION
- RESTURED THROUGH ACCEPTANCE OF A FOUND PERPETUATED LOCATION
- CONSIDERED A LOST CORNER AND REESTABLISHED THROUGH LOST CORNER PROPORTIONATE METHODS (INCLUDE A PLAN VIEW DRAWING SHOWING DISTANCES AND DIRECTIONS TO OTHER PUBLIC LAND SURVEY CORNERS USED FOR PROPORTIONING AND DETERMINING THE CORNER LOCATION)
 RESTORED OR REESTABLISHED IN A LOCATION THAT DIFFERS FROM A PREVIOUS RESTORATION OR REESTABLISHMENT (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND)
- CHECK IF THERE IS ADDITIONAL INFORMATION ON BACK

DESCRIBE THE MONUMENT AND ACCESSORIES USED TO PERPETUATE THE LOCATION OF THE CORNER. (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND) ALSO INCLUDE FOUR TIES TO THE SECTION CORNER AND DESCRIPTION OF THE TIES.

- SET 2" X 30" BRASS CAPPED LANGLADE CO. MONUMENT
- O SET 3/4" X 30" REBAR & TIES

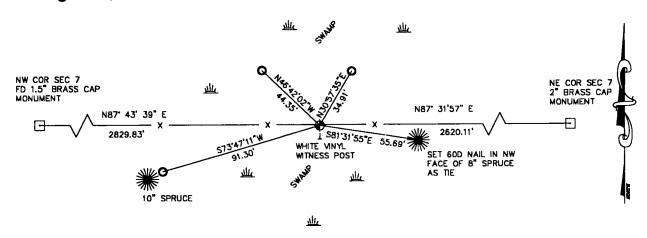

DANIEL E. HIGGINBOTHAM

Print name) CERTIFY THAT THE CORNER LOCATION SHOWN ON THIS WAS DETERMINED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. AND SURVEY MONUMENT RECORD IS CORRECT AND COMPLETE TO THE BEST NOWLEDGE AND BELIEF.

Hymboll

2-3-2000

