
3314070000

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

HISTORY OF ORIGINAL CORNER ESTABLISHMENT AND SUBSEQUENT RESTORATION AND DESCRIPTION OF ANY RECORD, MONUMENT OCCUPATIONAL, TESTIMONIAL OR OTHER EVIDENCE CONSIDERED:


THE ORIGINAL CORNER WAS ESTABLISHED IN 1865 BY JAMES NOWLIN. ORIGINAL BEARING TREES: ELM 12" N61W 14LKS., ELM 12" N39E 34LKS. 12/28/99 CHARLEY BRINKMEIER AND GERRY BAHAR FOUND A 1" PIPE NEXT TO A 4"X5" SCRIBED CEDAR POST. OUR MEASURED DISTANCE (5447.52") WAS WITHIN 2.5' OF NOWLIN'S ORIGINAL DISTANCE (82.50 CHAINS) FROM THE SW COR OF SEC 7. ACCEPTED AS BEST EVIDENCE OF ORIGINAL CORNER, REPLACED THE PIPE WITH A 2"X30" BRASS CAPPED LANGLADE CO. MONUMENT AND PLACED THE PIPE ALONGSIDE.



CORNER WAS: (CHECK ALL THAT APPLY)

- RESTORED THROUGH ACCEPTANCE OF AN OBLITERATED EVIDENCE LOCATION
- RESTORED THROUGH ACCEPTANCE OF A FOUND PERPETUATED LOCATION
- CONSIDERED A LOST CORNER AND REESTABLISHED THROUGH LOST CORNER PROPORTIONATE METHODS (INCLUDE A PLAN WEW DRAWING SHOWING DISTANCES AND DIRECTIONS TO OTHER PUBLIC LAND SURVEY CORNERS USED FOR PROPORTIONING AND DETERMINING THE CORNER LOCATION) RESTORED OR REESTABLISHED IN A LOCATION THAT DIFFERS FROM A PREVIOUS RESTORATION OR REESTABLISHMENT (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND)
- CHECK IF THERE IS ADDITIONAL INFORMATION ON BACK

DESCRIBE THE MONUMENT AND ACCESSORIES USED TO PERPETUATE THE LOCATION OF THE CORNER. (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND) ALSO INCLUDE FOUR TIES TO THE SECTION CORNER AND DESCRIPTION OF THE TIES.

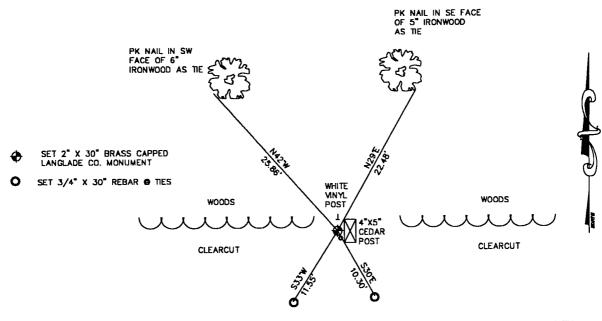

DANIEL E. HIGGINBOTHAM

PPINT NOME) CERTIFY THAT THE CORNER LOCATION SHOWN ON THIS WAS DETERMINED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. LAND SURVEY MONUMENT RECORD IS CORRECT AND COMPLETE TO THE BEST WOOM FORE AND BELLET.

la Hymboll

2-3-2000

