

CERTIFIED LAND CORNER RESTORATION

Index No. E-2

State of Wisconsin }
County of Lanlade } ss.

History of original corner establishment:

Corner set in the 1930 resurvey

I, Raymond J. Hallisy, do hereby certify that on the 11th day of October, 1969, I found evidence of the W 1/16 corner of Section 7 Township T34, North, Range 10E, Fourth, Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:

Found old stake standing marked S 6 S7 W1/16

Resident witnesses:

.....
.....
.....

Description of monument and accessories I established to perpetuate the original location of this corner.


Set 2" pipe with brass cap

B.T.'s to corner


Red pine 8" N90E 89.5 Ft.

Red pine 8" S29E 78.6 Ft.

B.T.'s faced at base of tree and scribed BT



FORM 985 H. C. MILLER CO., MILWAUKEE

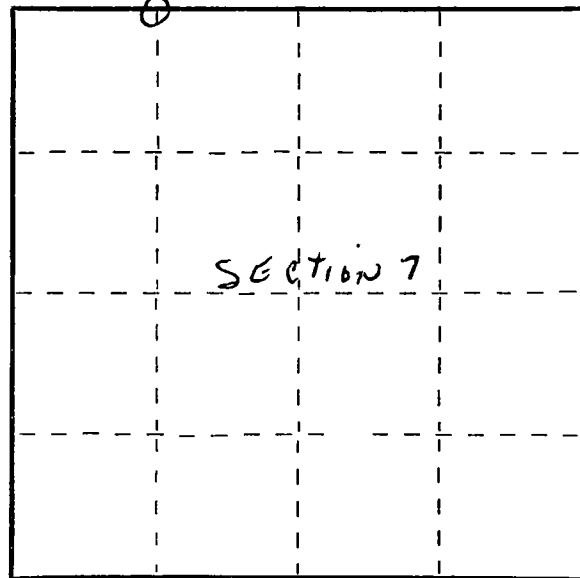

○ = Corner monument restored.

Dated at Antigo, Wis., this 11th day of October, 1969

Signature Raymond J. Hallisy Title Reg. Land Surveyor Registration No. S-685
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of....., I hereby certify that the within instrument was filed in this office for record on the.....day of....., 19..... at.....o'clock..... M.

.....
(Register of Deeds)

By.....Deputy