


# U. S. PUBLIC LAND SURVEY MONUMENT RECORD

**INSTRUCTIONS:** This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.  
 ○ = Corner monument restored.

ORIGINAL CORNER ESTABLISHED BY  
 JAMES L NOWLIN IN JULY, 1865.

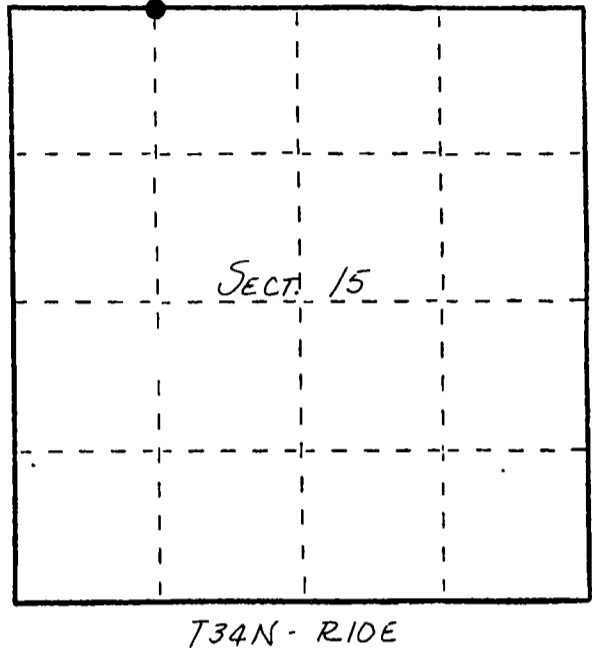


- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

RESET CORNER AFTER ROADWORK.  
 SET 1" x 30" IRON PIPE, 2 2" x 30" IRON  
 PIPE WITNESS MONUMENTS & SCRIBED  
 2 NEW B.T's.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.) Describe witness monuments.

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

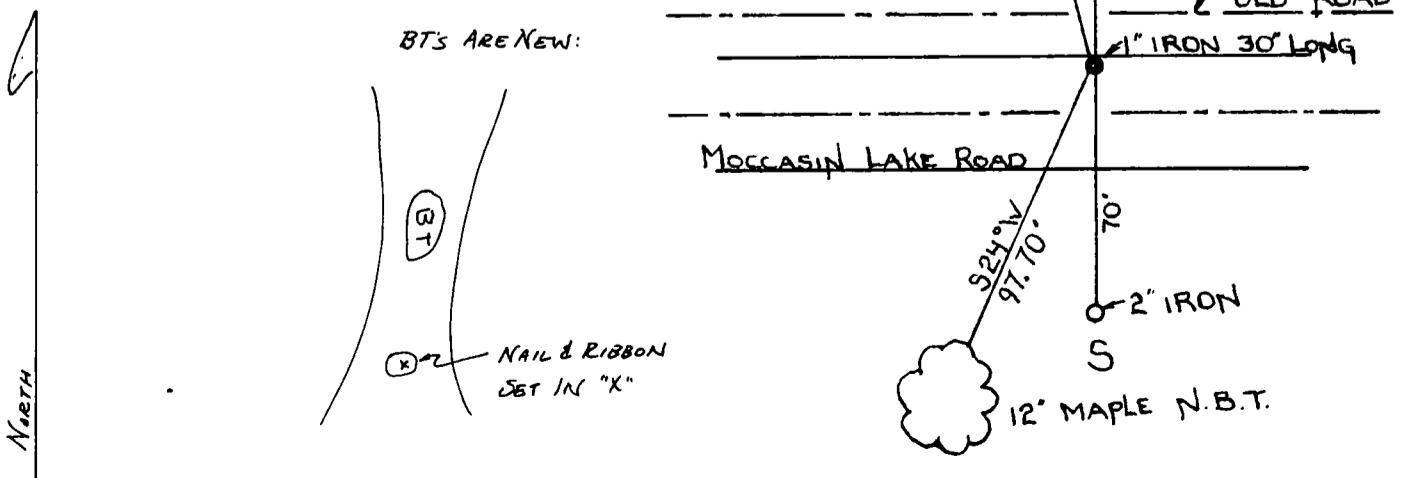

A1-1

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.


NONE

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

2

(g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

No

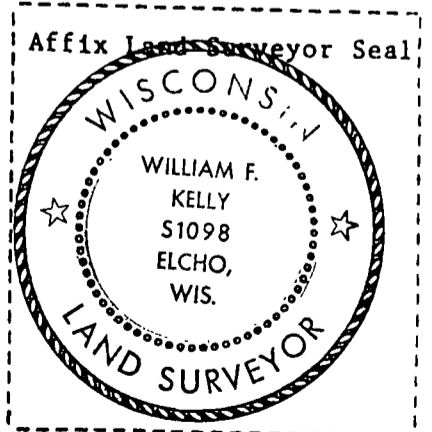

(1) I, WILLIAM F KELLY  
(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

William F. Kelly                      9-17-85  
Signature    Date

CERTIFIED LAND CORNER RESTORATION

34-10  
Index No. J-14

State of Wisconsin }  
County of Langlade } ss.

History of original corner establishment:

Corner set in the 1930's by: C. W. Borth  
E. F. Kowalke  
D. A. Hintz

I Raymond J. Hallisy, do hereby certify that on the 10th day of June, 1968, I found evidence of the W 1/16 corner of Section 15 Township 34, North, Range 10, Fourth, Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:

Found squared stake down, point intact.  
marked W 1/16 S10 S15 Cor 50 Lks N.


Resident witnesses:

.....  
.....  
.....

Description of monument and accessories I established to perpetuate the original location of this corner.

Set Std. 1 1/2" Pipe with cap marked W.C. C. 50 LKS. N. W 1/16  
BT's to witness corner.

FOR M 985 H. C. MILLER CO. MILWAUKEE

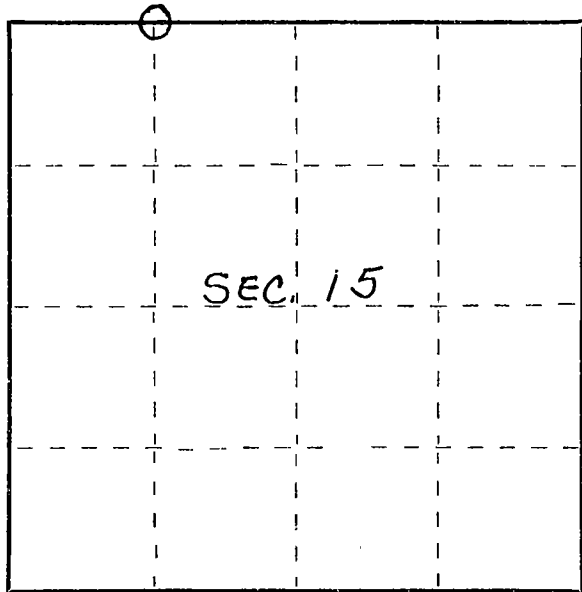

BASS LK. RD.  
IP →

8" HARD MAPLE →  
S 48 W 28' 2"  
SCRIBED BT

○ 22" OAK SCRIBED BT  
↑ S 57 E 16' 5"

Dated at Antigo, Wis., this 10th day of June, 1968.

Signature Raymond J. Hallisy Title Co. Land Surveyor Registration No. S-685  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

By \_\_\_\_\_ Deputy

○ = Corner monument restored.