

CERTIFIED LAND CORNER RESTORATION

34-10

Index No. R-12

State of Wisconsin }  
County of Lafayette } ss.

I, Raymond Hallisy, do hereby certify that on the 28<sup>th</sup> day of October, 1972, I found evidence of the E 1/6 corner of Section 21 Township 34, North, Range 10E, Fourth, Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

History of original corner establishment:


Corner Set in The 1930 Resurvey

Description of corner evidence found:


CORNER GONE  
BT  
IRONWOOD N47E 22.4 LKS.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 2" pipe with brass cap from old BT.  
New BT's  
HARD MAPLE 8" N35E 8FT 7IN.  
HARD MAPLE 4" S18W 28FT 8IN



FORM 985 H. C. MILLER CO., MILWAUKEE

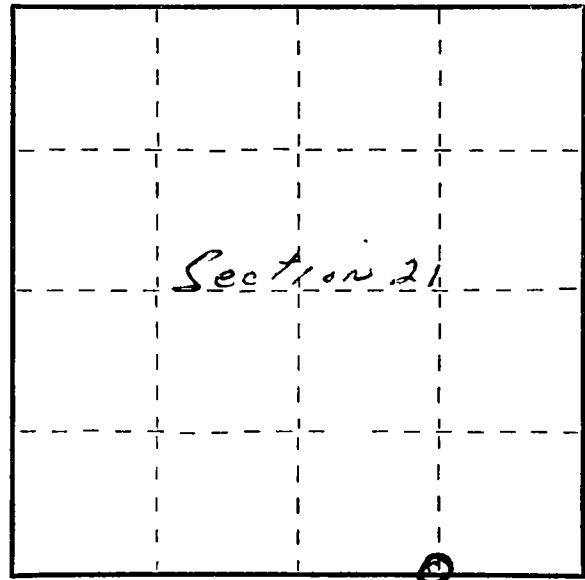

○ = Corner monument restored.

Dated at Antigo, Wis., this 28<sup>th</sup> day of October, 1972

Signature Raymond Hallisy Reg. Land Surveyor Registration No. 5685  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

By \_\_\_\_\_ Deputy