

CERTIFIED LAND CORNER RESTORATION

Index No. U-19

State of Wisconsin }
County of Langlade } ss.

I Daniel K. Plegger, do hereby certify that on the 28th day of October, 19 80, I ~~found~~ established SC 1/16 corner of Section 26 Township 34, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

History of original corner establishment:

No evidence of any previous corner.

Description of corner evidence found:

Corner established by traverse and computation. Total distance from C 1/4 corner section 26 to 1/4 corner between sections 26 and 35 is 2623.34 feet at bearing S 0-11-50 W. Set SC 1/16 corner at 1311.67 feet intermediate.

Resident witnesses:



Description of monument and accessories I established to perpetuate the original location of this corner.


Set a 1-1/2" I.D. iron pipe with screw-on brass cap, stamped: Projecting 8" above ground.

Marked N.B.T.'s:

- Tamarack 6" N60°E 8.32 feet
- Bl. Spruce 8" N83°W 18.62 feet scribed 1/16 B.T.
- Tamarack 5" S38°E 19.31 feet

T34N R10E
SC 1/16 S+26
S1537-1980

FORM 985 H. C. MILLER CO., MILWAUKEE

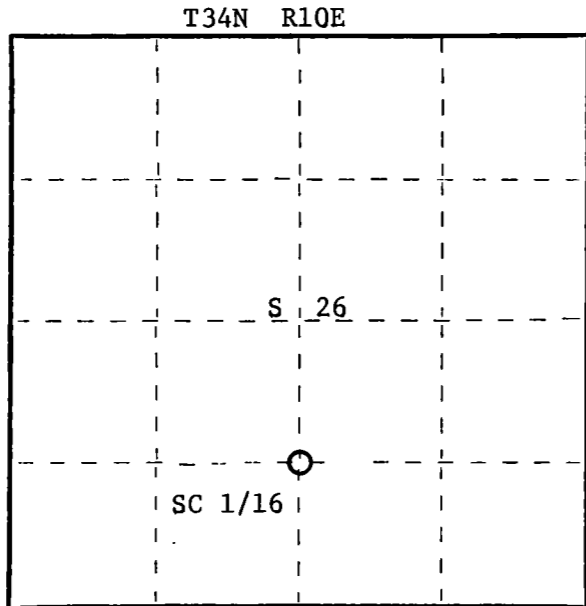

○ = Corner monument restored.

Dated at Rhineland, Wis., this 23rd day of February, 19 81

Signature Daniel K. Plegger Title Registered Land Surveyor Registration No. 1537
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19 _____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy