


CERTIFIED LAND CORNER RESTORATION

Index No. T-18


State of Wisconsin }  
County of Langlade } ss.

I Daniel K. Pleoger, do hereby certify that on the 30th day of October, 1980, I found established corner of the WC 1/16 Section 26 Township 34 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

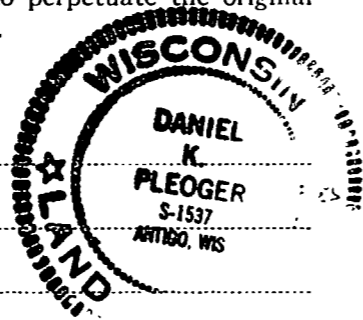

FORM 985 H. C. MILLER CO., MILWAUKEE

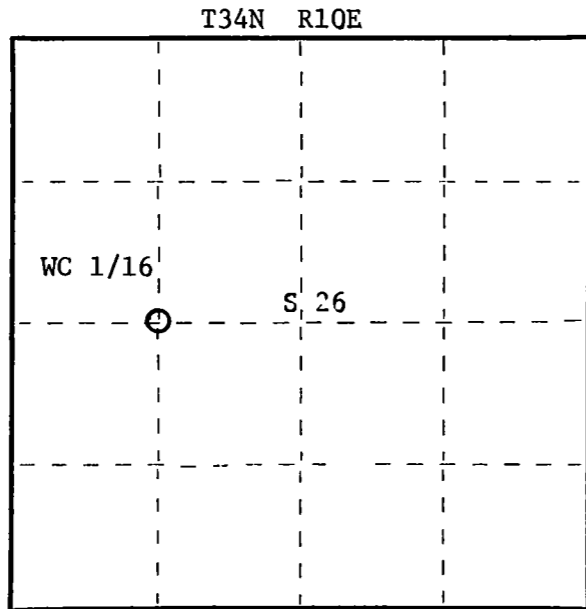

○ = Corner monument restored.

History of original corner establishment:

No evidence of any previous corner.

Description of corner evidence found:

Corner established by traverse and computation. Total distance from C 1/4 corner to 1/4 corner between sections 26 and 27 is 2667.622 feet at bearing N 87-31-18 W. Set WC 1/16 1333.811 feet intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" I.D. iron pipe with screw-on brass cap - stamped: Projecting 18" above ground.

Marked NBT's -

Sugar 5" N88°W 5.15 feet  
Hemlock 7" N45°W 24.57 feet - scribed 1/16 B.T.  
Maple 12" N53°E 18.27 feet

T34N R10E  
WC 1/16 S 26  
S1537-1980

Dated at Rhinelander, Wis., this 24th day of February, 1981

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

By \_\_\_\_\_ Deputy