

CERTIFIED LAND CORNER RESTORATION

Index No. T-16


State of Wisconsin }
County of Langlade } ss.

I Daniel K. Pleoger, do hereby certify that on the 12th day of August, 1980, I found established of the EC 1/16 corner of section 27 Township 34 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

.....
.....
.....


FORM 983 H. C. MILLER CO., MILWAUKEE

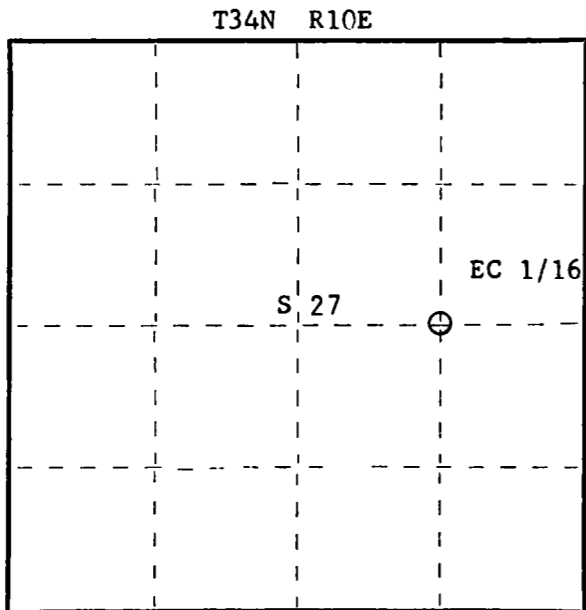

○ = Corner monument restored.

History of original corner establishment:

No evidence of any previous corner.

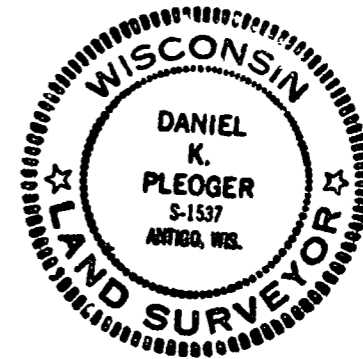

Description of corner evidence found:

Corner established by proportional measurement.

Computed distance from 1/4 corner between sections 26, 27 to C 1/4 corner section 27 is 2470.295 feet on E-W 1/4 line bearing S89-02-58W. Set E.C. 1/16 1235.147 feet intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" ID iron pipe with screw-on brass cap - stamped:

Monument projects 18" above ground.

Marked NBT's -

- Tamarack 5" N16°W 4.84 feet
- B.Spruce 6" N38°E 19.54 feet
- Tamarack 5" S63°E 40.20 feet
- scribed 1/16 B.T.

T34N R10E
EC 1/16 S 27
S1537-1980

Dated at Rhinelander, Wis., this 16th day of October, 1980.

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19_____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy