


CERTIFIED LAND CORNER RESTORATION

Index No. U-13

State of Wisconsin }  
County of Lanlade } ss.

History of original corner establishment:  
Corner established in 1937 by C. Borth.

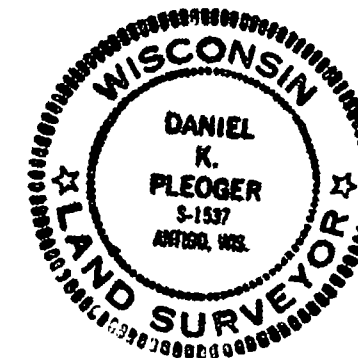

I, Daniel K. Pleoger, do hereby certify that on the 15th day of August, 1980, I found evidence of the S 1/16 corner of sections 27, 28 Township 34, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:

Ran traverse from section corner 27, 28, 33, 34 to 1/4 corner between sections 27, 28 for a distance of 2760.674 feet at bearing N1-41-33W. Set S 1/16 1380.337 feet intermediate. Corner sets .70 feet S.W. of old corner position, the remains of an old cedar point.

Resident witnesses:

.....  
.....  
.....


Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" I.D. iron pipe with screw-on brass cap - stamped:  
Monument projects 18" above ground.

Marked NBT's -  
Sugar 5" N39°E 18.27 feet  
Sugar 7" S87°E 15.52 feet  
Hemlock N39°W 23.43 feet  
scribed 1/16 BT.

T34N R10E  
S 1/16 28 + 27  
S1537-1980

FORM 965 H. C. MILLER CO., MILWAUKEE

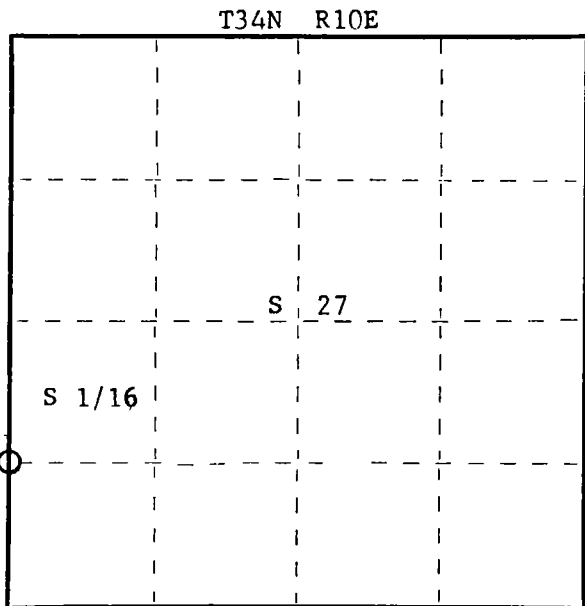

○ = Corner monument restored.

Dated at Rhineland, Wis., this 16th day of October, 1980

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

.....  
(Register of Deeds)

By.....Deputy