

CERTIFIED LAND CORNER RESTORATION

Index No. W-15


State of Wisconsin }  
County of Langlade } ss.

I Daniel K. Pleoger, do hereby certify that on the 8th day of September, 1980, I ~~found~~ established ~~the~~ NC 1/16 corner of Section 34 Township 34, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

.....  
.....  
.....

FORM 985 K. C. MILLER CO., MILWAUKEE

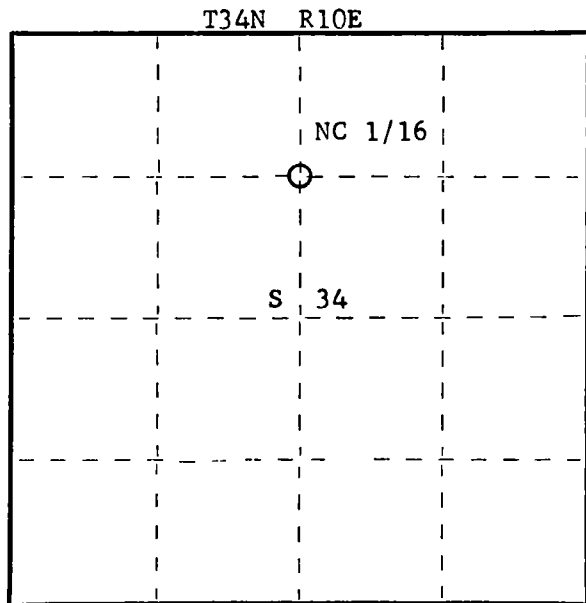

○ = Corner monument restored.

History of original corner establishment:

No evidence of any previous corner.

Description of corner evidence found:

Corner established by traverse and computation.

From C-1/4 section 34 to 1/4 corner between sections 27-34 total distance is 2859.648 feet at bearing S3-24-50E.

Set NC 1/16 1429.829 feet intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" x 50" iron pipe on east shoulder of Brady Lane for true corner. Top of pipe flush with ground.

Set a 1-1/2" I.D. iron pipe with screw-on brass cap for witness corner - stamped:

Monument projects 6" above ground.

Marked NBT's to true corner -

Hemlock 5" S43°W 62.24 feet

Hemlock 6" N48°W 54.00 feet

scribed 1/16 BT.

T34N R10E

NC 1/16 S <sup>34</sup> W.C.

E 40 ft.

S1537-1980

Dated at Rhineland, Wis., this 4th day of December, 1980

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. S-1537  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19..... at..... o'clock..... M.

.....  
(Register of Deeds)

By..... Deputy

