


CERTIFIED LAND CORNER RESTORATION

Index No. WI-23


State of Wisconsin }  
County of Langlade } ss.

I Daniel K. Pleoger, do hereby certify that on the 3rd day of December, 19 80, I ~~found~~ ~~established~~ ~~evidence of the~~ NC 1/16 corner of Section 36 Township 34, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

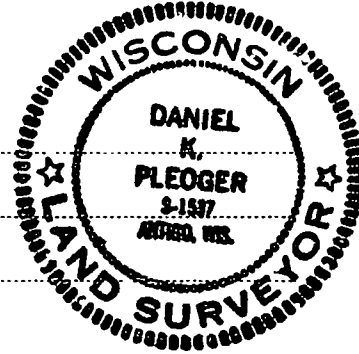

FORM 985 M. C. MILLER CO., MILWAUKEE

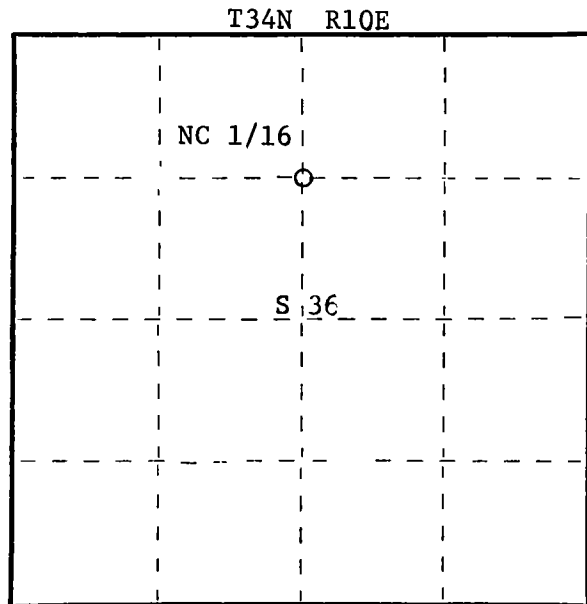

○ = Corner monument restored.

History of original corner establishment:

No evidence of any corner.

Description of corner evidence found:

Corner established by traverse and computation. Total distance from C 1/4 corner section 36 to 1/4 corner between sections 25 and 36 is NO-00-07W 2640.78 feet.

Set NC 1/16 corner 1320.391 feet intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" I.D. iron pipe with screw-on brass cap - stamped: Projecting 12" above ground.

Marked NBT's:-

- Maple 7" N54°W 12.95 feet
- Maple 7" S37°E 11.85 feet
- Maple 6" S58°W 16.47 feet
- all scribed 1/16 B.T.

T34N R10E  
NC 1/16 S 36  
S1537-1980

Dated at Rhineland, Wis., this 24th day of April, 19 81

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19 \_\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

By \_\_\_\_\_ Deputy