

CERTIFIED LAND CORNER RESTORATION

Index No. D-9

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:

I Philip T. Hansen, do hereby certify that on the 15th day of March, 1980, I ~~found~~ established ~~at~~ the S 1/16 corner of Sections 4 and 5 Township 34, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:

No evidence of any corner recovered.


Corner established by traverse and computation. Ran traverse from section corners 4, 5, 8 and 9 to the 1/4 corner between sections 4 and 5. Computed distance was 2603.59 feet at bearing N 4° 23' 20" E. Set the S 1/16 corner at 1301.80' intermediate.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagoner

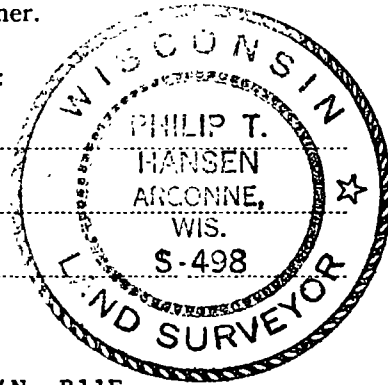

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" I.D. iron pipe with screw in brass cap, stamped: Monument projects 18" above ground.

Marked NBT's -

Maple 7" N25°E 8.30'

Maple 7" S27°E 21.81'


both scribed 1/16 BT.

T34N R11E

S 1/16 ⁴+⁵

S498 - 1980

T34N R11E

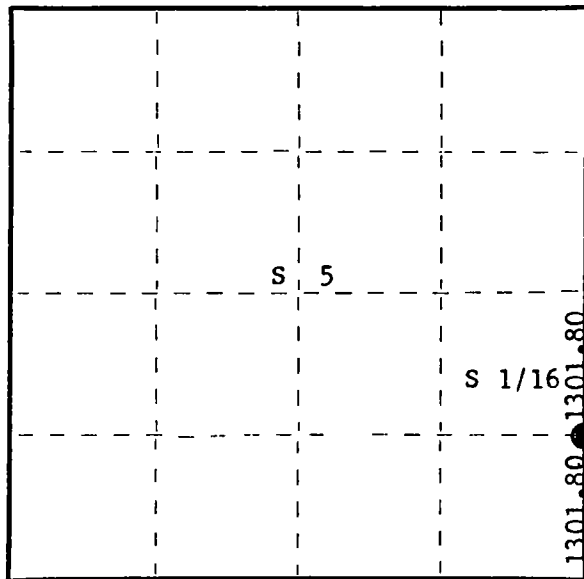

○ = Corner monument restored.

Dated at Rhineland, Wis., this 7th day of April, 1980

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Langlade, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE