

CERTIFIED LAND CORNER RESTORATION

Index No. D-7

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:

I Philip T. Hansen, do hereby certify that on the 26th day of March, 1980, I ~~found~~ established ~~xxxxxx~~ the SC 1/16 corner of Section 5 Township 34, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:


No evidence of any corner recovered. Corner established by traverse and computation. Computed distance from S 1/4 corner section 5 to the C 1/4 is 2618.23 feet at bearing N 3° 41' 43" E. Set SC 1/16 at 1309.115 feet intermediate.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagoner

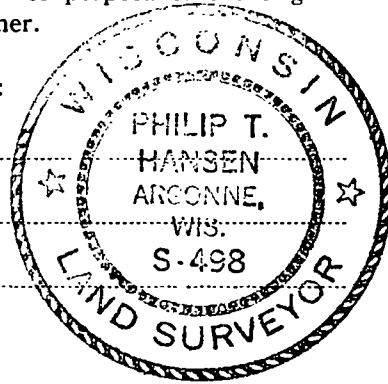


Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" I.D. iron pipe with screw in brass cap, stamped: Monument projects 18" above ground.

Marked NBT's -
Sugar 6" N7°W 22.72 feet
Sugar 7" N86°E 21.90 feet
both scribed 1/16 BT.

T34N R11E
SC 1/16 S+⁵
S498 - 1980

FORM 985 H. C. MILLER CO., MILWAUKEE

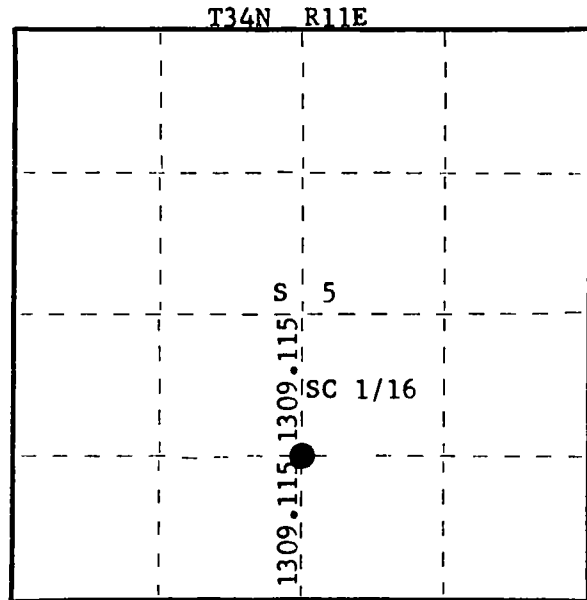

○ = Corner monument restored.

Dated at Rhineland, Wis., this 7th day of April, 1980

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Langlade, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy