

CERTIFIED LAND CORNER RESTORATION

Index No. G-6

State of Wisconsin }
County of Langlade } ss.


I, Philip T. Hansen, do hereby certify that on the 16th day of April, 19 80, I ~~found~~ established ~~at~~ the WC 1/16 corner of Section 8 Township 34, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagoner

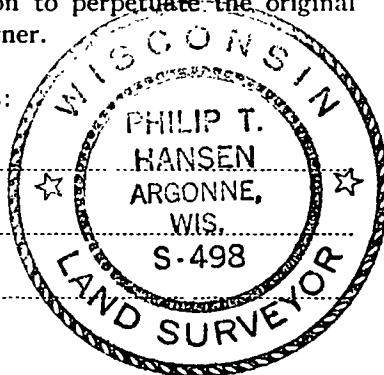

History of original corner establishment:

Description of corner evidence found:

No evidence of any corner recovered. Corner established by traverse and computation. Computed distance from W 1/4 corner section 8 to the C 1/4 corner is 2795.63 feet at bearing S 89° 06' 03" E. Set the WC 1/16 at 1397.82 feet intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.


Set a 1-1/2" I.D. iron pipe with screw-on brass cap, stamped: Monument projects 18" above ground.

Marked NBT's -

Sugar 10" S43°W 26.34 feet, scribed 1/16 BT.
Sugar 10" S62°E 19.00 feet, scribed 1/16 BT.

T34N R11E
WC 1/16 S+8
S498 - 1980

FORM 985 H. C. MILLER CO., MILWAUKEE

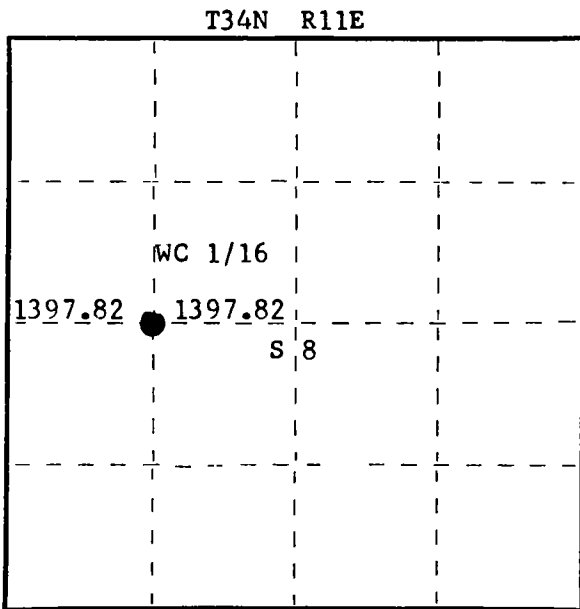

○ = Corner monument restored.

Dated at Rhineland, Wis., this 18th day of April, 19 80

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Langlade, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19 _____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy