

CERTIFIED LAND CORNER RESTORATION

Index No. F-7

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:

I Philip T. Hansen, do hereby certify that on the 16th day of April, 1980, I ~~found~~ established ~~corner of~~ the NC 1/16 corner of Section 8 Township 34, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:


No evidence of any corner recovered. Corner established by traverse and computation. Computed distance from N 1/4 corner to the C 1/4 corner is 2572.39' at bearing S 1° 47' 43" W. Set the NC 1/16 at 1286.20' intermediate.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagoner

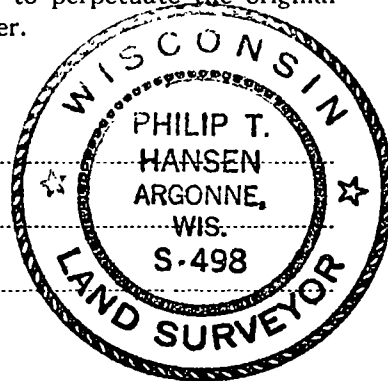


Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" I.D. iron pipe with screw-on brass cap, stamped: Monument projects 16" above ground.

Marked NBT's -
Cedar 9" N26°W 13.00 feet
Hemlock 12" S86°W 44.69 feet
both scribed 1/16 BT.

T34N R11E
NC 1/16 S+⁸
S498 - 1980

FORM 983 H. C. MILLER CO., MILWAUKEE

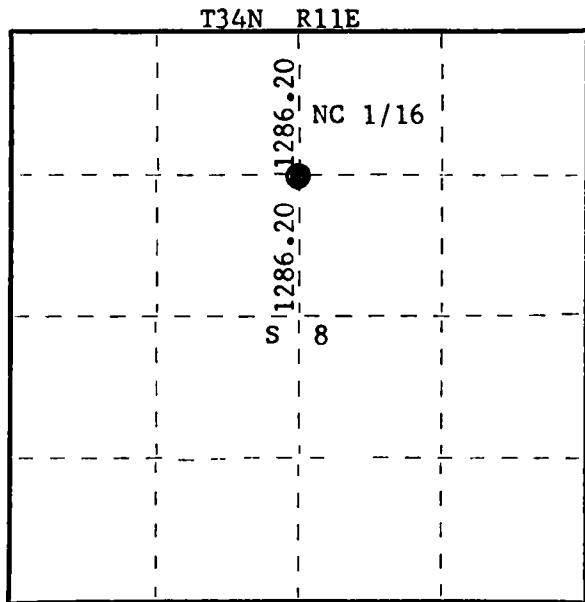

○ = Corner monument restored.

Dated at Rhineland, Wis., this 18th day of April, 1980

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Langlade, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy