

CERTIFIED LAND CORNER RESTORATION


Index No. G-1

State of Wisconsin }  
County of Lan glade } ss.

I, Raymond J. Hallisy, do hereby certify that on the 18th day of December, 1982, I found evidence of the 1/4 corner of Section 7 & 12 Township 34, North, Range 11 & 12 E, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

.....  
.....  
.....

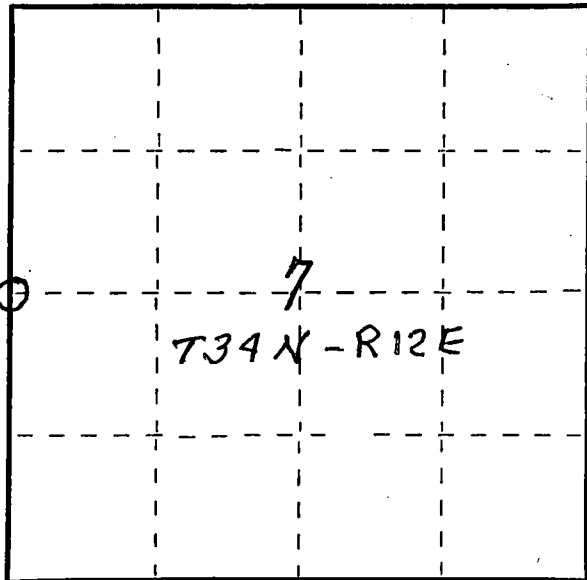

○ = Corner monument restored.

History of original corner establishment:

Corner set in 1930 Resurvey


Description of corner evidence found:

Fence Post with scribe mark  
Described by C.W. Borth

*50E  
COR FORM IN  
34-11*

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 2" Aluminum Pipe with CAP



NEW B.T.S

- 9" JACK Pine N82°E 14.5 FT
- 8" JACK Pine S6°E 17.7 FT
- 9" JACK Pine S50°W 11.1 FT
- 14" JACK PIPE N27°E 11.1 FT

Dated at Antigo, Wis., this 18th day of December, 1982.

Signature Raymond J. Hallisy Title Land Surveyor Registration No. S-685  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19..... at..... o'clock..... M.

.....  
(Register of Deeds)

By..... Deputy