

CERTIFIED LAND CORNER RESTORATION

34-11
Index No. W-17

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:

I Raymond J. Hallisy do hereby certify that on the 14th day of June, 1969, I found evidence of the MC corner of Bet. Sec. 34 & 35 Township 34, North, Range 11E, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

M. C. Set in 1952 by F. R. Wincentzen

Resident witnesses:


Description of corner evidence found:

Found 5" squared wood post marked MC 34 35
1" pipe on north side
Oak ~~XXXX~~ 8" N57E 13.2 Lks
Oak Stump 6" N32W 21 Lks

Description of monument and accessories I established to perpetuate the original location of this corner.

Set ~~XX~~ 1 1/2 inch pipe with 4" brass cap in cement
B.T.'s to M.C.
Red Maple 9" N33E 66 Ft. 5 inches
Basswood 12" N74E 38 Ft. 3 inches
B.T.'s faced at base and scribed BT

FORM 985 H. C. MILLER CO., MILWAUKEE

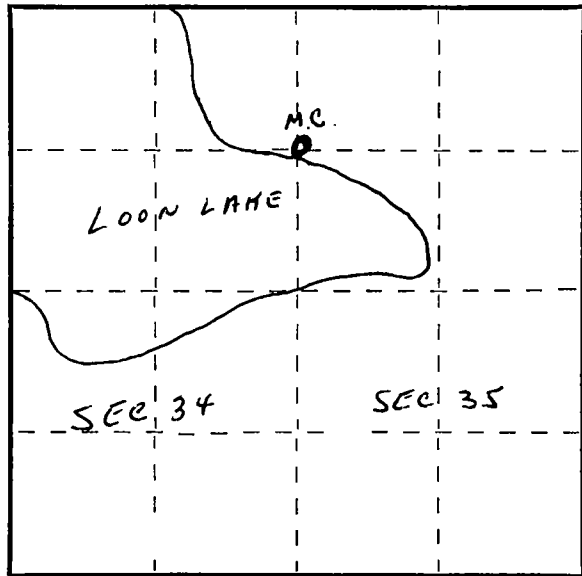

Dated at Antigo, Wis., this 14th day of June, 1969.

Signature Raymond J. Hallisy Title Reg. Land Surveyor Registration No. S-685
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ at _____ o'clock _____ M.

(Register of Deeds)

○ = Corner monument restored.

By _____ Deputy