

CERTIFIED LAND CORNER RESTORATION

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:

Corner set by C. Borth in the 1930's
Old BT White pine 1 1/4" S38 West 172 Feet.

I, Raymond J. Hallisy, do hereby
certify that on the 3rd day
of July, 1971, I found
evidence of the 1/4
corner of Section 21 & 22
Township 34, North, Range
12E, Fourth, Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Description of corner evidence found:

Found 1" axel 1' lond buried 18" deep in field with broken glass alongside

Resident witnesses:

.....
.....
.....

Description of monument and accessories I established to perpetuate the original location of this corner

Set 2" pipe in cement


BT's to corner

White Pine 18" N60W 346 Links
White Pine 1 1/4" N74W 301 Links

BT's faced at base of tree and scribed BT



FORM 985 M. C. MILLER CO., MILWAUKEE

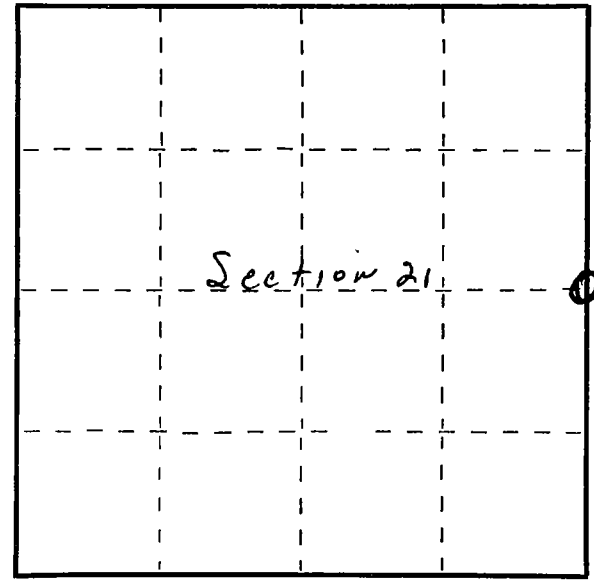

○ = Corner monument restored.

Dated at Antigo, Wis., this 3rd day of July, 1971.

Signature R. J. Hallisy Title Reg. Land Surveyor Registration No. 685
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of....., I hereby certify that the within
instrument was filed in this office for record on the.....day of....., 19.....
at.....o'clock..... M.

.....
(Register of Deeds)

By.....Deputy