

RECEIVED OCT 14 1998


U.S. PUBLIC LAND SURVEY MONUMENT RECORD

Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 7.08 U.S. Public Land Survey Monument Record (3) (a) (b) (c) (d) (e) (f) (g) (h) (i). An additional sheet may be added if necessary conform with said requirements.

(a) Corner location: Township 35 North

Range 10 East/West

REGISTER OF DEEDS OFFICE
ONEIDA COUNTY, WIS.

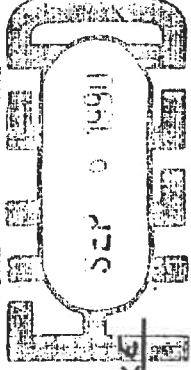

County ONEIDA

At 0 O'Clock M
THOMAS H. LEIGHTON
REGISTER OF DEEDS

Section 34

Town/City/Village E. ENTERPRISE W. SCHROEPKE

(b) (f) (g) (h) Description of monument found at this corner and if it was accepted, state all evidenc (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. not accepted or if nothing was found, state evidence used as basis for establishing location. reestablished through lost corner proportionate methods, indicate all monuments, distances an directions used to establish. Indicate type of monument found or set and sign post.


1859 - H.C. FELLOWS ESTABLISHED ORIGINAL CORNER

1930 - CORNER RESET ON CCC PROJECT

1973 - R. HALLISY FOUND OLD BT STUMP - MAPLE S 82° W, 40.3 IKR.
LOT STAKE 300 FT. WEST. SET 6" BOLT IN ROAD & 2" BRASS CAP EAST

1990 - FOUND 6" BOLT IN ROAD & WITNESS PIPE WITH 2" BRASS CAP
MADE 4 N BT'S. SET WHITE POST NEXT TO W.C.

(c) (d) (e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

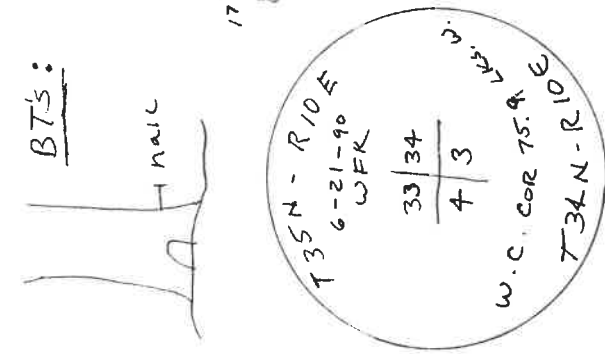

MAGNETIC

NO SCALE

(i) I, WILLIAM F. KELLY
(type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

William F. Kelly 8/28/90

Signature

Date



Index No. 115

Stamp