


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

I N S T R U C T I O N S:

This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.
 ● = Corner monument restored.

South Quarter corner,
 Section 2,
 Township 33 North,
 Range 12 East,
 Langlade County,
 Wisconsin.

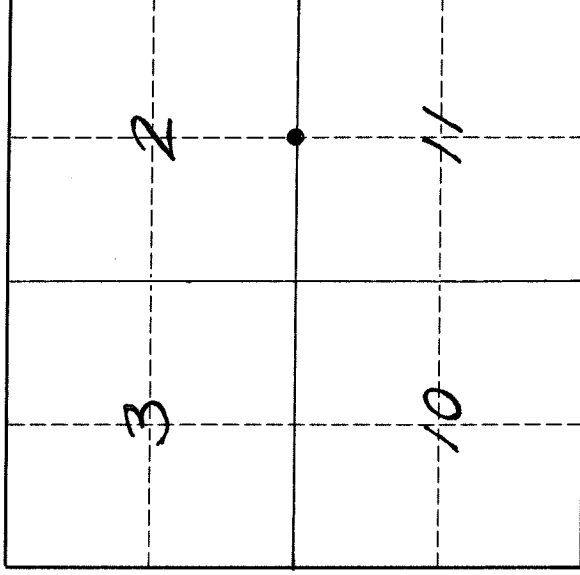


T. 33 N., R. 12 E.

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.
 The original corner was set in 1865 by James Nowlin, Deputy Surveyor. Original bearing trees: Birch, 12", S65W, 6 lks (3.96'), and a Hemlock, 20", N08E, 20 Lks (13.2'). Mr. Ivan Schmidt, longtime adjoining landowner, pointed out an old fence corner post (now fallen over) that his father set about 40 years ago to replace an old scribed wood post. Mr. Schmidt also indicated that an old dirt mound to the northeast of the corner was a big hemlock tree a very long time ago. The location of this dirt mound matches direction and distance to the original Hemlock BT. Based on Mr. Schmidt's knowledge of the old wood post and tree, I accepted the location of the fence corner post as the original corner location, and in its place, I set a 2" x 48" aluminum pipe monument with 3 1/4" aluminum cap and magnet. Top of monument is 3" above ground in a mound of dirt.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)
 v = Bearing tree with BT sign facing corner and bark smoothed blue paint band at 5' above ground. Tie dist. is to alum. nail on left side of tree in small blaze.
 BT bearing is magnetic using hand compass.

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

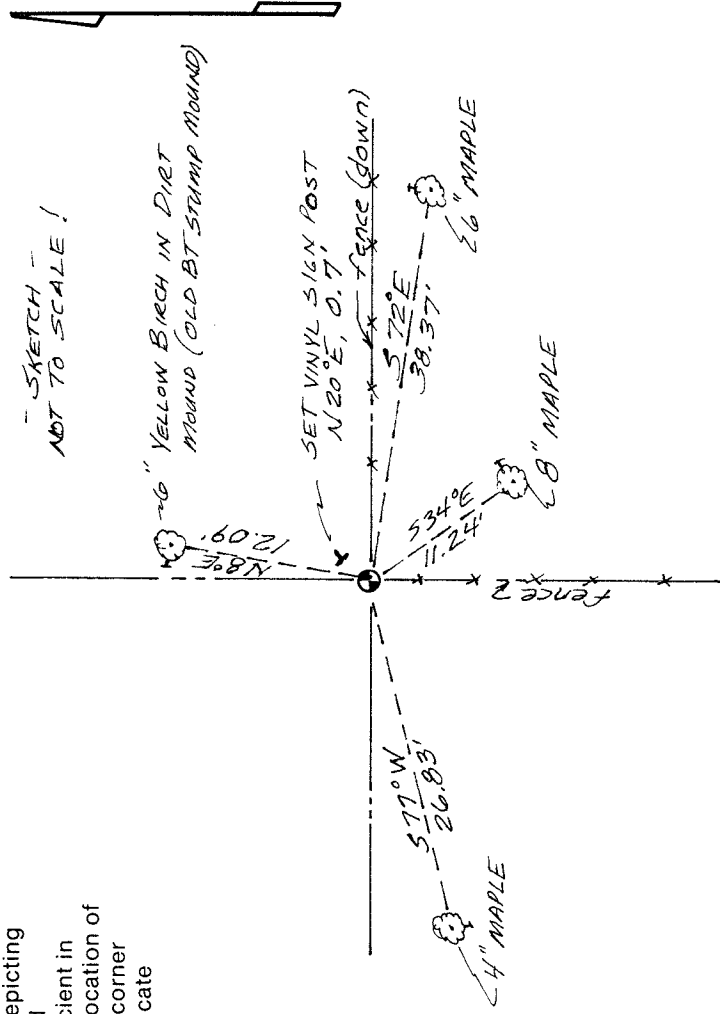

Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.
No discrepancy.

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?
A found perpetuated location.

(g & h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location.
No.

(i) I, David E. Tlusty, Langlade County Surveyor,
(type or print name)

certify that the corner location shown on this record was determined by me or under my direction and control and that this U. S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

David E. Tlusty Signature
3/23/93 Date

