

CERTIFIED LAND CORNER RESTORATION

Index No. T 4

State of Wisconsin }
County of Langlade } ss.

History of original corner establishment:

I Philip T. Hansen, do hereby certify that on the 24th day of February, 19 76, I ~~found~~ established ~~monument~~ the EC-1/16 corner of Section 30 Township 34, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Description of corner evidence found: Corner established from previously established C-1/4 corner and E-1/4 corner between Sections 30 and 29. Set EC-1/16 corner at 21.117 chains S88°15'W of E-1/4 corner, equidistant.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagone

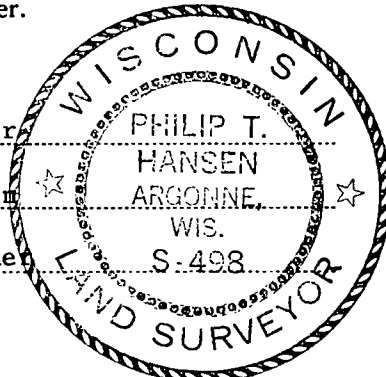

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 2" iron pipe with brass cap for EC-1/16. Cap stamped -
Pipe projects 12" above ground level.


S498
T34N, R11E

NBT's - White spruce 12" S61°E 39.2 links scribed 1/16 BT
White spruce 12" N68°W 83.7 links scribed 1/16 BT

EC-1/16 $\frac{S}{30}$
CPI - 1976

Pipe and BT's painted blue.

FORM 985 Wisconsin Planning Machinery Co. Milwaukee, Wisconsin

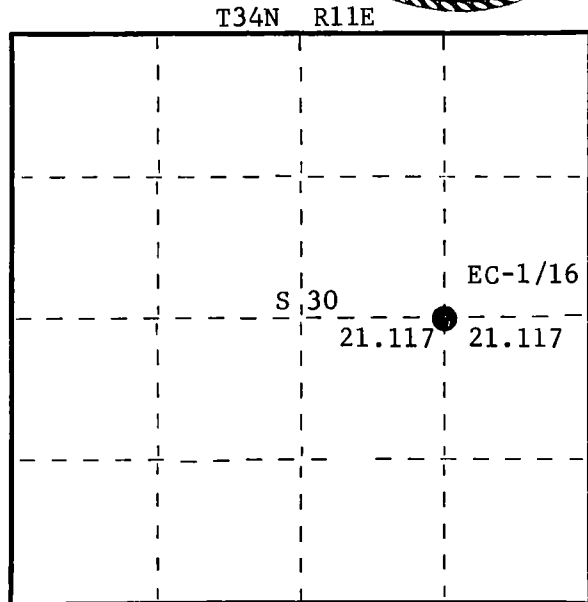

○ = Corner monument restored.

Dated at Rhineland, Wis., this 4th day of March, 19 76

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Langlade, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19 _____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy GS