

RESURVEY - Section 22, Township 33 North, Range 11 East. LANGLADE COUNTY

Survey lines between:

1. Center of Section and $S\frac{1}{4}$ corner; set $1/8$ corner on above line
2. Run true line between $N\frac{1}{2}SE\frac{1}{4}$ and $S\frac{1}{2}SE\frac{1}{4}$ (Set post at mid point on this line. This is NOT the true corner.

This survey run off established corners which were set by E. F. Kowalke and C. W. Borth in February to November, 1936.

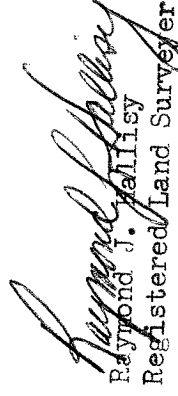
April 17, 1963 - Transit Survey - 2 chain tape - 200 links

Commence at center of Section Brass Cap, run random line true south (20° E. Dec.) to $S\frac{1}{4}$ corner (Brass Cap). Random line 39.09 chains and fell 375 links west of corner. Eighth corner set 187.5 links east of random line at mid point of line; 19.545 chains south of center of section 22, Township 33 North, Range 11 East. Set corner; cedar post.

April 17, 1963

Commence at $1/8$ corner wood post between East $\frac{1}{4}$ corner and SE section corner. Run random line west at $N88^{\circ} 30'W$ (magnetic north). Line 41.83 chains and fell 3.3 links south of corner. Set temporary wood post, SE $1/16$ corner at 20.915 chains and 1.65 links north of random line. This is NOT a true corner as N-S line between $E\frac{1}{2} SE\frac{1}{4}$ and $W\frac{1}{2}SE\frac{1}{4}$ has to be run to establish this point.

By:


Raymond J. Hallisy
Registered Land Surveyor

Crew:

John R. Baltus
District Forester, W.C.D.

Christy T. Hauge
Assistant District Forester W.C.D.

Gerald Kryka
Conservation Aid W.C.D.

RECORD #

10895

LANGLADE COUNTY SURVEYORS OFFICE

DATE FILED: 7/7/16 BY: R. TLUSTY

93-11